

Overload relay 12.5...50 A Electronic For motor protection Size S2,  
Class 10E Contactor mounting Main circuit: Screw Auxiliary circuit:  
Screw Manual-Automatic-Reset



product brand name	SIRIUS
product designation	solid-state overload relay
product type designation	3RB3
General technical data	
size of overload relay	S2
size of contactor can be combined company-specific	S2
power loss [W] for rated value of the current	
• at AC in hot operating state	1.8 W
• at AC in hot operating state per pole	0.6 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• in networks with grounded star point between auxiliary and auxiliary circuit	300 V
• in networks with grounded star point between auxiliary and auxiliary circuit	300 V
• in networks with grounded star point between main and auxiliary circuit	600 V

<ul style="list-style-type: none"> <li>• in networks with grounded star point between main and auxiliary circuit</li> </ul>	690 V
<b>protection class IP</b>	
<ul style="list-style-type: none"> <li>• on the front</li> </ul>	IP20
<ul style="list-style-type: none"> <li>• of the terminal</li> </ul>	IP00
<b>shock resistance</b>	15g / 11 ms
<ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-27</li> </ul>	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 8g / 11 ms
<b>vibration resistance</b>	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s <sup>2</sup> ; 10 cycles
<b>thermal current</b>	50 A
<b>recovery time</b>	
<ul style="list-style-type: none"> <li>• after overload trip with automatic reset typical</li> </ul>	3 min
<ul style="list-style-type: none"> <li>• after overload trip with remote-reset</li> </ul>	0 min
<ul style="list-style-type: none"> <li>• after overload trip with manual reset</li> </ul>	0 min
<b>type of protection according to ATEX directive 2014/34/EU</b>	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]
certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001
<b>reference code acc. to IEC 81346-2</b>	F

#### Ambient conditions

<ul style="list-style-type: none"> <li>• installation altitude at height above sea level maximum</li> </ul>	2 000 m
<b>ambient temperature</b>	
<ul style="list-style-type: none"> <li>• during operation</li> </ul>	-25 ... +60 °C
<ul style="list-style-type: none"> <li>• during storage</li> </ul>	-40 ... +80 °C
<ul style="list-style-type: none"> <li>• during transport</li> </ul>	-40 ... +80 °C
<b>temperature compensation</b>	-25 ... +60 °C
relative humidity during operation	10 ... 95 %

#### Main circuit

<b>number of poles for main current circuit</b>	3
<b>adjustable current response value current of the current-dependent overload release</b>	12.5 ... 50 A
<b>operating voltage</b>	
<ul style="list-style-type: none"> <li>• rated value</li> </ul>	690 V
<ul style="list-style-type: none"> <li>• at AC-3 rated value maximum</li> </ul>	690 V
<b>operating frequency rated value</b>	50 ... 60 Hz
<b>operational current rated value</b>	50 A
<b>operating power</b>	
<ul style="list-style-type: none"> <li>• for 3-phase motors at 400 V at 50 Hz</li> </ul>	7.5 ... 22 kW
<ul style="list-style-type: none"> <li>• for AC motors at 500 V at 50 Hz</li> </ul>	11 ... 30 kW
<ul style="list-style-type: none"> <li>• for AC motors at 690 V at 50 Hz</li> </ul>	11 ... 45 kW

#### Auxiliary circuit

<b>design of the auxiliary switch</b>	integrated
<b>number of NC contacts for auxiliary contacts</b>	1
• note	for contactor disconnection
<b>number of NO contacts for auxiliary contacts</b>	1
• note	for message "tripped"
<b>number of CO contacts</b>	
• for auxiliary contacts	0
<b>operational current of auxiliary contacts at AC-15</b>	
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
<b>operational current of auxiliary contacts at DC-13</b>	
• at 24 V	2 A
• at 60 V	0.55 A
• at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A

#### Protective and monitoring functions

<b>trip class</b>	CLASS 10E
<b>design of the overload release</b>	electronic

#### UL/CSA ratings

<b>full-load current (FLA) for 3-phase AC motor</b>	
• at 480 V rated value	50 A
• at 600 V rated value	50 A
<b>contact rating of auxiliary contacts according to UL</b>	B600 / R300

#### Short-circuit protection

<b>design of the fuse link</b>	
• for short-circuit protection of the main circuit	
— with type of coordination 1 required	gG: 250 A
— with type of assignment 2 required	gG: 200 A
• for short-circuit protection of the auxiliary switch required	fuse gG: 6 A

#### Installation/ mounting/ dimensions

<b>mounting position</b>	any
<b>fastening method</b>	Contactor mounting
<b>height</b>	99 mm
<b>width</b>	55 mm
<b>depth</b>	104 mm

## Connections/ Terminals

<b>product function</b> <ul style="list-style-type: none"> <li>removable terminal for auxiliary and control circuit</li> </ul>	Yes
<b>type of electrical connection</b> <ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control circuit</li> </ul>	screw-type terminals screw-type terminals
<b>arrangement of electrical connectors for main current circuit</b>	Top and bottom
<b>type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— stranded</li> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>at AWG cables for main contacts</li> <li>type of connectable conductor cross-sections for auxiliary contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>type of connectable conductor cross-sections at AWG cables for auxiliary contacts</li> </ul>	1x (1 ... 50 mm <sup>2</sup> ), 2x (1 ... 35 mm <sup>2</sup> ) 2x (10 ... 35 mm <sup>2</sup> ), 1x 50 mm <sup>2</sup> 1x (1 ... 50 mm <sup>2</sup> ), 2x (1 ... 35 mm <sup>2</sup> ) 1x (1 ... 35 mm <sup>2</sup> ), 2x (1 ... 25 mm <sup>2</sup> ) 2x (18 ... 2), 1x (18 ... 1)  1x (0.5 ... 4 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> ) 1x (0,5 ... 4 mm <sup>2</sup> ), 2x (0,5 ... 2,5 mm <sup>2</sup> ) 1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> ) 1x (20 ... 14), 2x (20 ... 14)
<b>tightening torque</b> <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> <li>for auxiliary contacts with screw-type terminals</li> </ul>	3 ... 4.5 N·m 0.8 ... 1.2 N·m
<b>design of screwdriver shaft</b>	Diameter 5 to 6 mm
<b>size of the screwdriver tip</b>	Pozidriv PZ 2
<b>design of the thread of the connection screw</b> <ul style="list-style-type: none"> <li>for main contacts</li> <li>of the auxiliary and control contacts</li> </ul>	M6 M3

## Communication/ Protocol

<b>type of voltage supply via input/output link master</b>	No
--	----

## Electromagnetic compatibility

<b>conducted interference</b> <ul style="list-style-type: none"> <li>due to burst acc. to IEC 61000-4-4</li> <li>due to conductor-earth surge acc. to IEC 61000-4-5</li> <li>due to conductor-conductor surge acc. to IEC 61000-4-5</li> </ul>	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3  2 kV (line to earth) corresponds to degree of severity 3  1 kV (line to line) corresponds to degree of severity 3
--	--

- due to high-frequency radiation acc. to IEC 61000-4-6

10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz

field-based interference acc. to IEC 61000-4-3

10 V/m

electrostatic discharge acc. to IEC 61000-4-2

6 kV contact discharge / 8 kV air discharge

## Display

display version

- for switching status

Slide switch

## Certificates/ approvals

General Product Approval

EMC

For use in hazardous locations



CSA



CCC



UL



RCM



ATEX

Declaration of Conformity

Test Certificates

Marine / Shipping



EG-Konf.

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



ABS



LRS

Marine / Shipping

other



PRS



RINA



RMRS



DNVGL.COM/AF

[Confirmation](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3036-1UB0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3036-1UB0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3036-1UB0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RB3036-1UB0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3036-1UB0&lang=en)


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RB3036-1UB0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3036-1UB0&objecttype=14&gridview=view1>

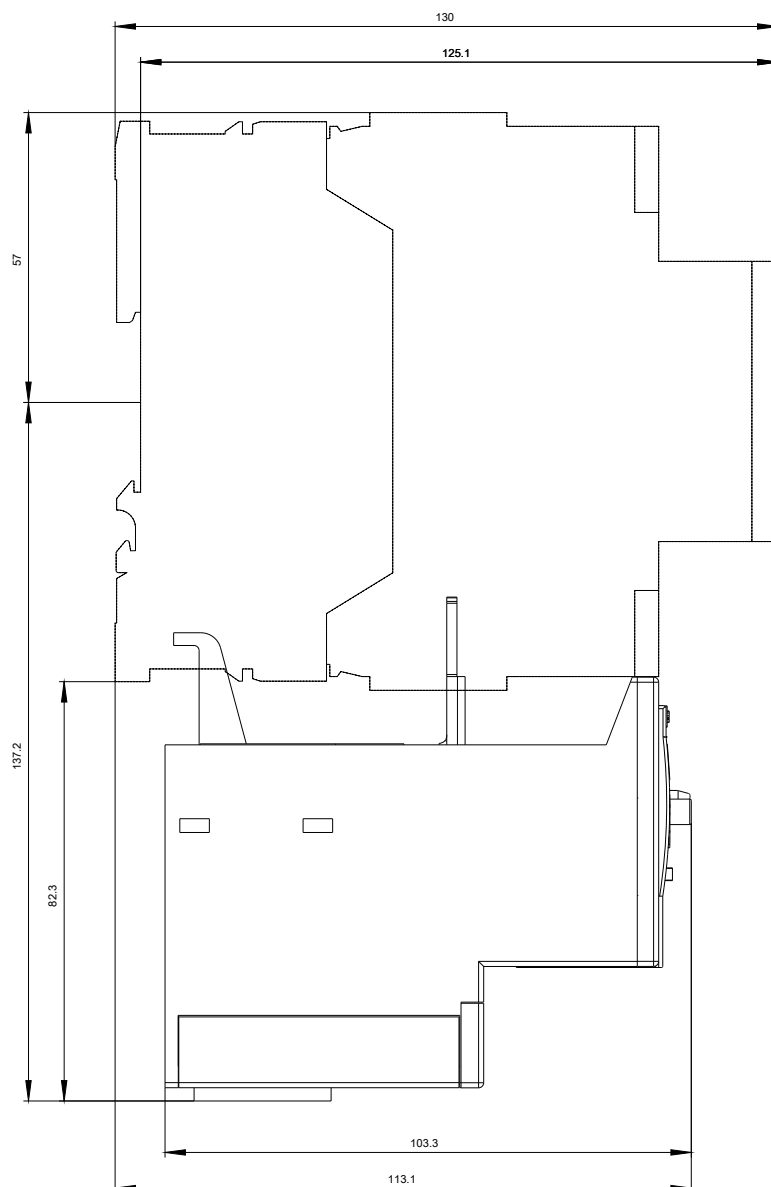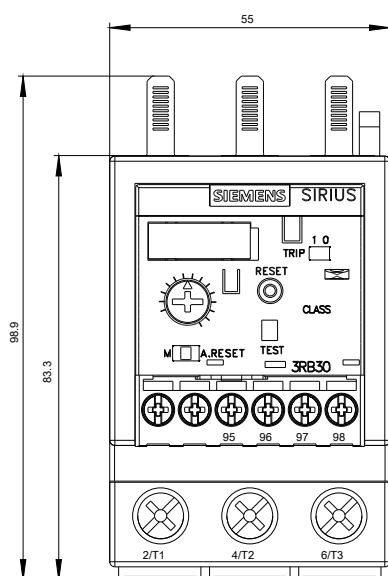

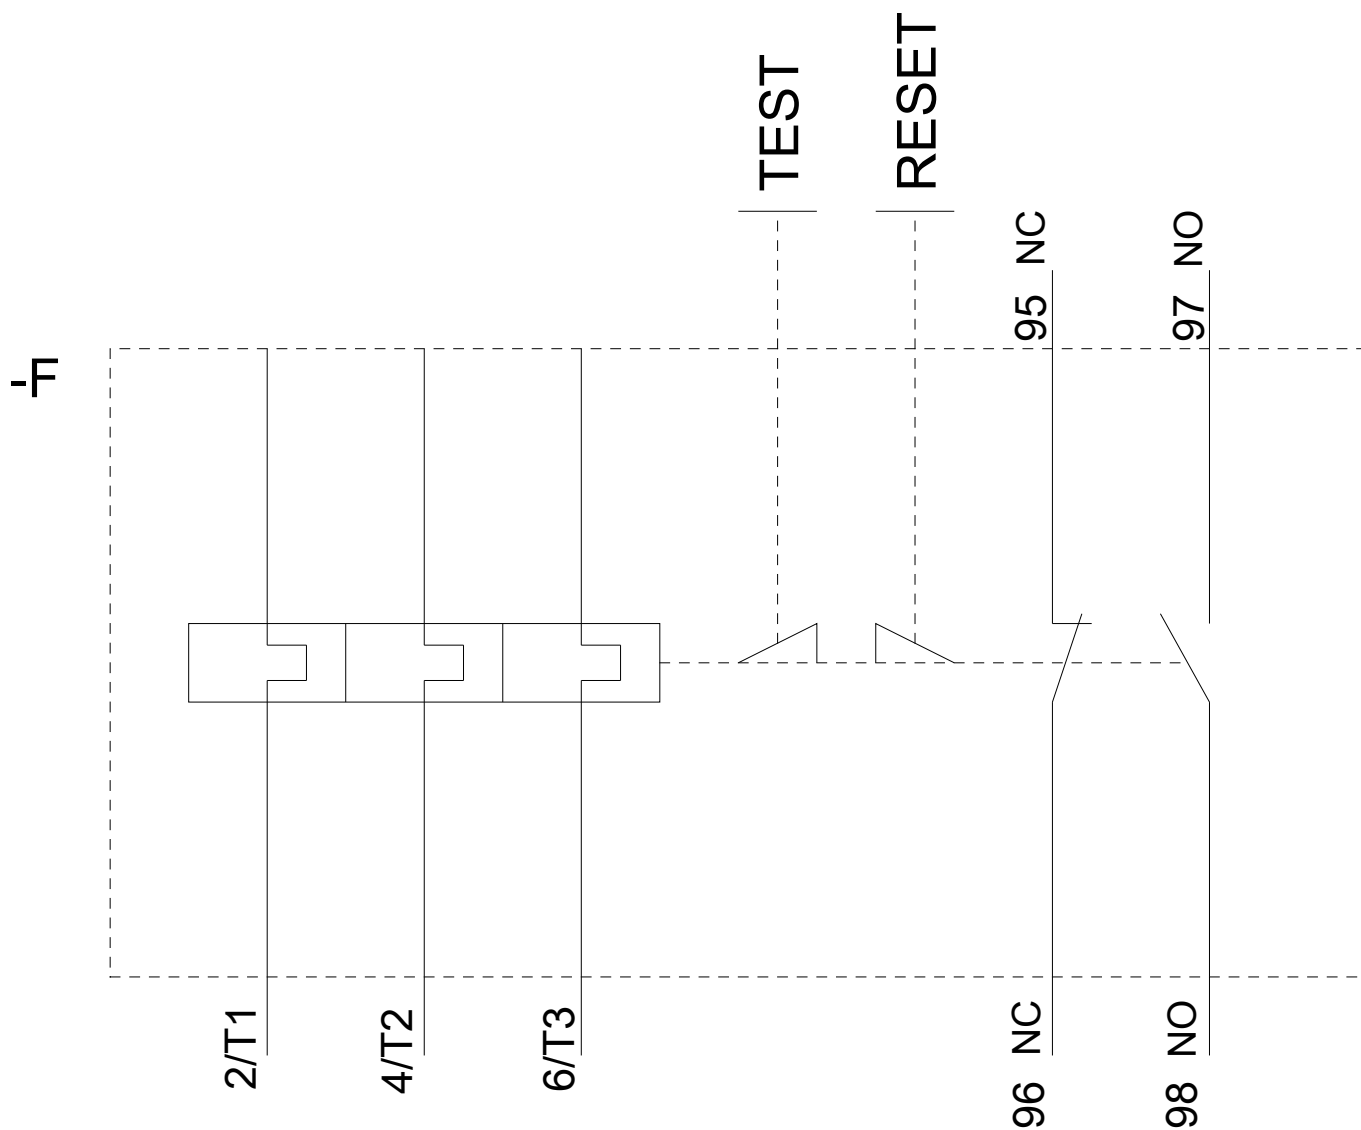

last modified:

11/17/2020