


Abrasive fibre disc

CS 561

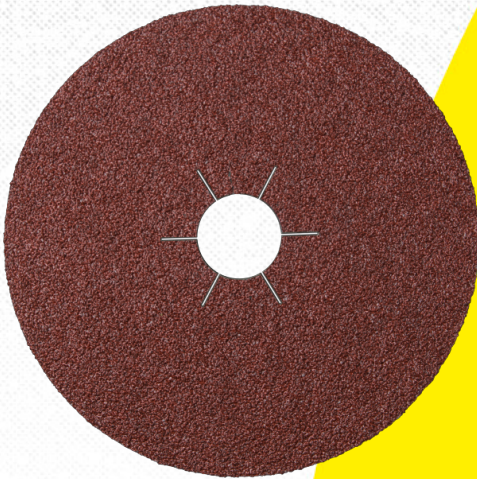

Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close

Product benefit

For universal use - Largest selection of diameters, grit sizes and hole patterns|For universal use - Largest selection of diameters, grit sizes and hole patterns - Special large package reduces storage costs

Application

Steel	●
NF metals	●
Metals	●
Plastic	○
Stainless steel	○
Wood	○

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
Diameter x Hole in mm				Hole pattern		grain		Vmax m/s		Max. RPM		type of coat.abras.		bore shape		Packing unit/pcs.		Cat. number								
100 x 16				⊙ 10		16		80 m/s		15300 rpm		CS 561		round hole		25		65708								
100 x 16				⊙ 10		24		80 m/s		15300 rpm		CS 561		round hole		25		65713								
100 x 16				⊙ 10		36		80 m/s		15300 rpm		CS 561		round hole		25		65718								
100 x 16				⊙ 10		60		80 m/s		15300 rpm		CS 561		round hole		25		65730								
100 x 16				⊙ 10		80		80 m/s		15300 rpm		CS 561		round hole		25		65735								
100 x 16				⊙ 10		100		80 m/s		15300 rpm		CS 561		round hole		25		65739								

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de



Diameter x Hole in mm	Hole pattern	grain	Vmax m/s	Max. RPM	type of coat.abras.	bore shape	Packing unit/pcs.	Cat. number
115 x 22	⊗ 30	16	80 m/s	13300 rpm	CS 561	star shaped hole	25	10977
115 x 22	⊗ 30	24	80 m/s	13300 rpm	CS 561	star shaped hole	25	10978
115 x 22	⊗ 30	36	80 m/s	13300 rpm	CS 561	star shaped hole	25	10980
115 x 22	⊗ 30	40	80 m/s	13300 rpm	CS 561	star shaped hole	25	10981
115 x 22	⊗ 30	60	80 m/s	13300 rpm	CS 561	star shaped hole	25	10983
115 x 22	⊗ 30	80	80 m/s	13300 rpm	CS 561	star shaped hole	25	10984
115 x 22	⊗ 30	100	80 m/s	13300 rpm	CS 561	star shaped hole	25	10985
115 x 22	⊗ 30	120	80 m/s	13300 rpm	CS 561	star shaped hole	25	10986
115 x 22	⊙ 10	80	80 m/s	13300 rpm	CS 561	round hole	25	25472
115 x 22	⊙ 10	60	80 m/s	13300 rpm	CS 561	round hole	25	66318
115 x 22	⊙ 10	24	80 m/s	13300 rpm	CS 561	round hole	25	72298
125 x 22	⊗ 30	16	80 m/s	12200 rpm	CS 561	star shaped hole	25	11009
125 x 22	⊗ 30	24	80 m/s	12200 rpm	CS 561	star shaped hole	25	11010
125 x 22	⊗ 30	36	80 m/s	12200 rpm	CS 561	star shaped hole	25	11012
125 x 22	⊗ 30	60	80 m/s	12200 rpm	CS 561	star shaped hole	25	11015
125 x 22	⊗ 30	80	80 m/s	12200 rpm	CS 561	star shaped hole	25	11016
125 x 22	⊗ 30	100	80 m/s	12200 rpm	CS 561	star shaped hole	25	11017
125 x 22	⊗ 30	120	80 m/s	12200 rpm	CS 561	star shaped hole	25	11018
150 x 22	⊙ 10	100	80 m/s	10200 rpm	CS 561	round hole	25	312255
150 x 22	⊙ 10	120	80 m/s	10200 rpm	CS 561	round hole	25	312256
180 x 22	⊗ 30	16	80 m/s	8500 rpm	CS 561	star shaped hole	25	11057
180 x 22	⊗ 30	24	80 m/s	8500 rpm	CS 561	star shaped hole	25	11058
180 x 22	⊗ 30	36	80 m/s	8500 rpm	CS 561	star shaped hole	25	11060
180 x 22	⊗ 30	50	80 m/s	8500 rpm	CS 561	star shaped hole	25	11062

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de



Diameter x Hole in mm	Hole pattern	grain	Vmax m/s	Max. RPM	type of coat.abras.	bore shape	Packing unit/pcs.	Cat. number
180 x 22	⊗ 30	60	80 m/s	8500 rpm	CS 561	star shaped hole	25	11063
180 x 22	⊗ 30	80	80 m/s	8500 rpm	CS 561	star shaped hole	25	11064
180 x 22	⊗ 30	100	80 m/s	8500 rpm	CS 561	star shaped hole	25	11065
180 x 22	⊗ 30	120	80 m/s	8500 rpm	CS 561	star shaped hole	25	11066
180 x 22	⊙ 10	80	80 m/s	8500 rpm	CS 561	round hole	25	184517
235 x 22	⊙ 10	120	80 m/s	6500 rpm	CS 561	round hole	25	66520

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de

