

SH3.0/3.6/4.0/5.0/6.0RS

Residential Hybrid Single Phase Inverter

NEW



FLEXIBLE APPLICATION

- 80~460 V wide battery voltage range
- Ideal for both retrofitting and new installations
- Built-in smart PID recovery function



ENERGY INDEPENDENCE

- Seamless transition to backup mode, for protection against power outages
- Fast Charging or discharging, enabling higher self-consumption results
- Built-in EMS with advanced customization



USER FRIENDLY SETUP


- Plug and play installation
- iSolarCloud monitoring available on App and Web
- Lightweight and compact, optimized for heat-dissipation




SMART MANAGEMENT

- Real time data (10 seconds refresh sample)
- 24/7 live monitoring both online and with integrated display
- Online IV curve scan and diagnosis

CIRCUIT DIAGRAM

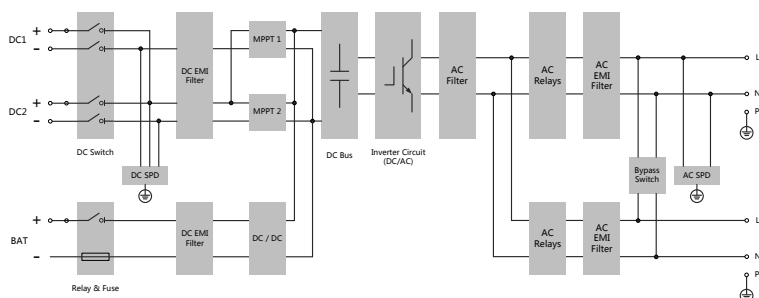

EFFICIENCY CURVE

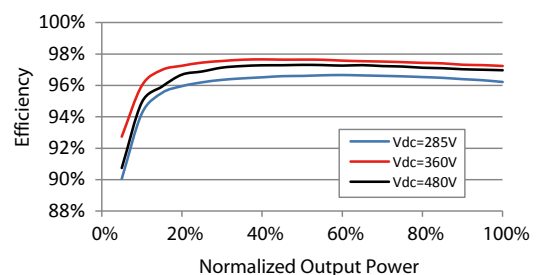

Type designation	SH3.0RS	SH3.6RS	SH4.0RS	SH5.0RS	SH6.0RS
Input (DC)					
Recommended max. PV input power	10000 Wp	10700 Wp	11000 Wp	12000 Wp	13000 Wp
Max. PV input voltage	600 V				
Min. operating PV voltage / Start-up input voltage	40 V / 50 V				
Rated PV input voltage	360 V				
MPP voltage range	40V – 560 V				
No. of independent MPP inputs	2				
Default No. of PV strings per MPPT	1				
Max. PV input current	32 A (16 A/16 A)				
Max. DC short-circuit current	40 A (20 A/20 A)				
Input / Output (AC)					
Max. AC input power from grid	10000 VA	10700 VA	11000 VA	12000 VA	13000 VA
Rated AC output power	3000 W	3680 W	4000 W	5000 W*	6000 W
Max. AC output power	3000 VA	3680 VA	4000 VA	5000 VA*	6000 VA
Rated AC output current (at 230 V)	13.1 A	16 A	17.4 A	21.8 A**	26.1 A
Max. AC output current	13.7 A	16 A	18.2 A	22.8 A**	27.3 A
Rated AC voltage	220 / 230 / 240 V				
AC voltage range	154 V – 276 V				
Rated grid frequency /	50 Hz / 45 – 55 Hz				
Grid frequency range	60 Hz / 55 – 65 Hz				
Harmonic (THD)	<3 % (of rated power)				
Power factor at rated power /	>0.99 at default value at rated power				
Adjustable power factor	(adj. 0.8 overexcited/leading to 0.8 underexcited/lagging)				
Feed-in phases / connection phases	1 / 1				
Efficiency					
Max. efficiency / European efficiency	97.4 % / 97.0 %	97.5 % / 97.1 %	97.6 % / 97.2 %	97.7 % / 97.3 %	97.7 % / 97.3 %
Protection & Function					
Grid monitoring	Yes				
DC reverse polarity protection	Yes				
AC short circuit protection	Yes				
Leakage current protection	Yes				
Surge Protection	DC Type II /AC Type II				
DC switch(solar)	Yes				
DC fuse(battery)	Yes				
PID recovery function	Yes				
Battery input reverse polarity protection	Yes				
Battery Data					
Battery type	Li-ion battery				
Battery voltage	80 V – 460 V				
Max charge / discharge current	30 A / 30 A				
Max charge / discharge power	6600 W				
General Data					
Dimensions (W * H * D)	490 * 340 * 170 mm				
Weight	18.5 kg				
Mounting method	Wall-mounting bracket				
Topology (Solar / Battery)	Transformerless / Transformerless				
Degree of protection	IP65				
Operating ambient temperature range	-25 °C to 60 °C				
Allowable relative humidity range	0 % – 100 %				
Cooling method	Natural convection				
Max. operating altitude	4000 m				
Display	LED digital display & LED indicator				
Communication	RS485 / Ethernet / WLAN / CAN				
DI / DO	DI * 4 / DO *1 / DRM				
DC connection type	MC4 (PV) / Sunclix (Battery)				
AC connection type	Plug and Play				
Grid compliance	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 61000-3-11, IEC/EN 61000-3-12, EN 62477-1, AS/NZS 4777.2, EN 50549-1, CEI 0-21, G98 / G99				
Backup Data (on grid mode)					
Rated output power for backup load	6000 W				
Rated output current for backup load	27.3 A				
Backup Data (off-grid mode)					
Rated voltage	220 V / 230 V / 240 V (±2 %)				
Frequency range	50 Hz / 60 Hz (±0.2 %)				
Total output THDv for linear load	< 2 %				
Switch time to emergency mode	< 10 ms				
Rated output power	3000 W / 3000 VA	3680 W / 3680 VA	4000 W / 4000 VA	5000 W / 5000 VA	6000 W / 6000 VA
Peak output power	8400 VA, 10s				

* AS4777.2 4999W, 4999VA ** AS 4777.2 :Rated and Max. AC current is 21.7A



SBR096/128/160/192/224/256

SUNGROW

Clean power for all

High Voltage LFP Battery

New

10 Years Warranty



HIGH-PERFORMANCE

- 100% usable energy
- 30 A continuous charging and discharging current

SAFETY

- Lithium iron phosphate battery
- Multi-stages protection design and rigorous safety certification

FLEXIBILITY

- Extendable during lifetime¹
- Support 3–8 modules per unit, max. 4 units in parallel, 9–100 kWh capacity range

EASY INSTALLATION

- Compact and light, single person installation
- Plug and Play, wiring-less connection between modules
- Seamless integration with hybrid inverter



Type designation	SBR096	SBR128	SBR160	SBR192	SBR224	SBR256
Technical properties						
	3 modules	4 modules	5 modules	6 modules	7 modules	8modules
System Data						
Battery type	LiFePO4 (Lithium Iron Phosphate Battery / LFP) prismatic cell					
Battery module	3.2kWh, 33kg, 625*130*330 mm (W*H*D without handle)					
Energy (usable) ²	9.6 kWh	12.8 kWh	16 kWh	19.2 kWh	22.4 kWh	25.6 kWh
Nominal voltage	192 V	256 V	320 V	384 V	448 V	512 V
Operating voltage	168 – 219 V	224 – 292 V	280 – 365 V	336 – 438 V	392 – 511 V	448 – 584 V
Max. charging / discharging current: continuous	30 A					
Max. charging / discharging current: 10 s pulse	42 A					
Display	SOC indicator, status indicator					
Communication interface	CAN					
Protection						
Over / under voltage protection	Yes					
Over current protection	Yes					
Over / under temperature protection	Yes					
DC breaker	Yes					
General Data						
Dimensions (W*H*D)	625*545*330 mm	625*675*330 mm	625*805*330 mm	625*935*330 mm	625*1065*330 mm	625*1195*330 mm
Weight	114 kg	147 kg	180 kg	213 kg	246 kg	279 kg
Installation location	Indoor / Outdoor					
Mounting method	Floor stand (standard)					
Operating ambient temperature range	Charge: 0 to 50°C Discharge: -30 to 50°C					
Degree of protection	IP55					
Allowable relative humidity range	0% to 95% (non-condensing)					
Max. operating altitude	2000 m					
Cooling method	Natural convection					
Certificates	CE, CEC, IEC 62619, IEC 62040, JIS C 8715-2, UN38.3					
Warranty ³	10 Years					
Expansion adaptation ⁴	Up to 4 units in parallel (need extra junction box)					

1: Available in Q3, 2021

2: Test conditions: 25°C, 100% depth of discharge (DOD), 0.2C charge&discharge

3: Refer to battery warranty letter for conditional application

4: Available in Q3, 2021