

Power contactor, AC-3 400 A, 200 kW / 400 V without coil Auxiliary contacts 2 NO + 2 NC 3-pole, Size S12 Main conductor: Busbar connections Drive: conventional Auxiliary conductor: Screw terminals



product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT1

General technical data

size of contactor	S12
product extension	
<ul style="list-style-type: none"> function module for communication 	No
<ul style="list-style-type: none"> auxiliary switch 	Yes
power loss [W] for rated value of the current	
<ul style="list-style-type: none"> at AC in hot operating state 	105 W
<ul style="list-style-type: none"> at AC in hot operating state per pole 	35 W
surge voltage resistance	
<ul style="list-style-type: none"> of main circuit rated value 	8 kV
<ul style="list-style-type: none"> of auxiliary circuit rated value 	6 kV
maximum permissible voltage for safe isolation	
<ul style="list-style-type: none"> between coil and main contacts acc. to EN 60947-1 	690 V
protection class IP	
<ul style="list-style-type: none"> on the front 	IP00; IP20 on the front with cover / box terminal

• of the terminal	IP00
shock resistance at rectangular impulse	
• at AC	8,5g / 5 ms, 4,2g / 10 ms
• at DC	8,5g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	13,4g / 5 ms, 6,5g / 10 ms
• at DC	13,4g / 5 ms, 6,5g / 10 ms
mechanical service life (switching cycles)	
• of contactor typical	10 000 000
• of the contactor with added electronically optimized auxiliary switch block typical	5 000 000
• of the contactor with added auxiliary switch block typical	10 000 000
reference code acc. to IEC 81346-2	Q

Ambient conditions

• installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C

Main circuit

number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
• at AC-3 rated value maximum	1 000 V
operational current	
• at AC-1 at 400 V — at ambient temperature 40 °C rated value	430 A
• at AC-1 — up to 690 V at ambient temperature 40 °C rated value	430 A
— up to 690 V at ambient temperature 60 °C rated value	400 A
— up to 1000 V at ambient temperature 40 °C rated value	200 A
— up to 1000 V at ambient temperature 60 °C rated value	200 A
• at AC-3 — at 400 V rated value	400 A
— at 500 V rated value	400 A
— at 690 V rated value	400 A
— at 1000 V rated value	180 A

<ul style="list-style-type: none"> • at AC-4 at 400 V rated value 	350 A
<ul style="list-style-type: none"> • at AC-5a up to 690 V rated value 	378 A
<ul style="list-style-type: none"> • at AC-5b up to 400 V rated value 	332 A
<ul style="list-style-type: none"> • at AC-6a <ul style="list-style-type: none"> — up to 230 V for current peak value n=20 rated value 	395 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — up to 400 V for current peak value n=20 rated value 	395 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — up to 500 V for current peak value n=20 rated value 	395 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — up to 690 V for current peak value n=20 rated value 	395 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — up to 1000 V for current peak value n=20 rated value 	180 A
<ul style="list-style-type: none"> • at AC-6a <ul style="list-style-type: none"> — up to 230 V for current peak value n=30 rated value 	264 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — up to 400 V for current peak value n=30 rated value 	264 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — up to 500 V for current peak value n=30 rated value 	264 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — up to 690 V for current peak value n=30 rated value 	264 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — up to 1000 V for current peak value n=30 rated value 	180 A
minimum cross-section in main circuit	
<ul style="list-style-type: none"> • at maximum AC-1 rated value 	300 mm ²
operational current for approx. 200000 operating cycles at AC-4	
<ul style="list-style-type: none"> • at 400 V rated value 	150 A
<ul style="list-style-type: none"> • at 690 V rated value 	135 A
operational current	
<ul style="list-style-type: none"> • at 1 current path at DC-1 <ul style="list-style-type: none"> — at 24 V rated value 	400 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — at 110 V rated value 	33 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — at 220 V rated value 	3.8 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — at 440 V rated value 	0.9 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — at 600 V rated value 	0.6 A
<ul style="list-style-type: none"> • with 2 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value 	400 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — at 110 V rated value 	400 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — at 220 V rated value 	400 A
<ul style="list-style-type: none"> <ul style="list-style-type: none"> — at 440 V rated value 	4 A

<ul style="list-style-type: none"> — at 600 V rated value 	2 A
<ul style="list-style-type: none"> • with 3 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value 	400 A 400 A 400 A 11 A 5.2 A
operational current	
<ul style="list-style-type: none"> • at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value 	400 A 3 A 0.6 A 0.18 A 0.125 A 400 A 400 A 2.5 A 0.65 A 0.37 A 400 A 400 A 400 A 1.4 A 0.75 A
operating power	
<ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value — at 1000 V rated value 	132 kW 200 kW 250 kW 400 kW 250 kW
operating power for approx. 200000 operating cycles at AC-4	
<ul style="list-style-type: none"> • at 400 V rated value • at 690 V rated value 	85 kW 133 kW
operating apparent power at AC-6a	
<ul style="list-style-type: none"> • up to 230 V for current peak value n=20 rated value • up to 400 V for current peak value n=20 rated value 	150 000 kV·A 270 000 V·A

<ul style="list-style-type: none"> • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 1000 V for current peak value n=20 rated value 	340 000 V·A 470 000 V·A 310 000 V·A
operating apparent power at AC-6a <ul style="list-style-type: none"> • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 1000 V for current peak value n=30 rated value 	100 000 V·A 180 000 V·A 220 000 V·A 310 000 V·A 310 000 V·A
short-time withstand current in cold operating state up to 40 °C <ul style="list-style-type: none"> • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum 	6 600 A; Use minimum cross-section acc. to AC-1 rated value 5 761 A; Use minimum cross-section acc. to AC-1 rated value 4 143 A; Use minimum cross-section acc. to AC-1 rated value 2 635 A; Use minimum cross-section acc. to AC-1 rated value 2 088 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency <ul style="list-style-type: none"> • at AC • at DC 	2 000 1/h 2 000 1/h
operating frequency <ul style="list-style-type: none"> • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-4 maximum 	700 1/h 200 1/h 500 1/h 130 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
closing delay <ul style="list-style-type: none"> • at AC • at DC 	45 ... 100 ms 45 ... 100 ms
opening delay <ul style="list-style-type: none"> • at AC 	60 ... 100 ms

• at DC	60 ... 100 ms
arcing time	10 ... 15 ms
control version of the switch operating mechanism	Without operating mechanism

Auxiliary circuit

number of NC contacts for auxiliary contacts	
• instantaneous contact	2
number of NO contacts for auxiliary contacts	
• instantaneous contact	2
operational current at AC-12 maximum	10 A
operational current at AC-15	
• at 230 V rated value	6 A
• at 400 V rated value	3 A
• at 500 V rated value	2 A
• at 690 V rated value	1 A
operational current at DC-12	
• at 24 V rated value	10 A
• at 48 V rated value	6 A
• at 60 V rated value	6 A
• at 110 V rated value	3 A
• at 125 V rated value	2 A
• at 220 V rated value	1 A
• at 600 V rated value	0.15 A
operational current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	2 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
• at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)

UL/CSA ratings

full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	361 A
• at 600 V rated value	382 A
yielded mechanical performance [hp]	
• for 3-phase AC motor	
— at 200/208 V rated value	125 hp
— at 220/230 V rated value	150 hp
— at 460/480 V rated value	300 hp
— at 575/600 V rated value	400 hp

contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link <ul style="list-style-type: none"> for short-circuit protection of the main circuit <ul style="list-style-type: none"> with type of coordination 1 required with type of assignment 2 required for short-circuit protection of the auxiliary switch required 	gG: 630 A (690 V, 100 kA) gG: 500 A (690 V, 100 kA), aM: 400 A (690 V, 50 kA), BS88: 450 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)
Installation/ mounting/ dimensions	
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
fastening method <ul style="list-style-type: none"> side-by-side mounting 	screw fixing Yes
height	214 mm
width	160 mm
depth	225 mm
required spacing <ul style="list-style-type: none"> with side-by-side mounting <ul style="list-style-type: none"> forwards upwards downwards at the side for grounded parts <ul style="list-style-type: none"> forwards upwards at the side downwards for live parts <ul style="list-style-type: none"> forwards upwards downwards at the side 	20 mm 10 mm 10 mm 0 mm 20 mm 10 mm 10 mm 10 mm 20 mm 10 mm 10 mm 10 mm
Connections/ Terminals	
width of connection bar	25 mm
thickness of connection bar	6 mm
diameter of holes	11 mm
number of holes	1
type of electrical connection <ul style="list-style-type: none"> for main current circuit for auxiliary and control circuit 	Connection bar screw-type terminals



<ul style="list-style-type: none"> • at contactor for auxiliary contacts • of magnet coil 	Screw-type terminals Screw-type terminals
type of connectable conductor cross-sections <ul style="list-style-type: none"> • at AWG cables for main contacts 	2/0 ... 500 kcmil
connectable conductor cross-section for main contacts <ul style="list-style-type: none"> • stranded 	70 ... 240 mm ²
connectable conductor cross-section for auxiliary contacts <ul style="list-style-type: none"> • solid or stranded • finely stranded with core end processing • type of connectable conductor cross-sections for auxiliary contacts <ul style="list-style-type: none"> — solid — solid or stranded — finely stranded with core end processing • type of connectable conductor cross-sections at AWG cables for auxiliary contacts 	0.5 ... 4 mm ² 0.5 ... 2.5 mm ² 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²), max. 2x (0,75 ... 4 mm ²) 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) 2x (20 ... 16), 2x (18 ... 14), 1x 12
AWG number as coded connectable conductor cross section <ul style="list-style-type: none"> • for auxiliary contacts 	18 ... 14

Safety related data

B10 value <ul style="list-style-type: none"> • with high demand rate acc. to SN 31920 	1 000 000
product function <ul style="list-style-type: none"> • mirror contact acc. to IEC 60947-4-1 • positively driven operation acc. to IEC 60947-5-1 	Yes No
touch protection against electrical shock	finger-safe when touched vertically from front acc. to IEC 60529
suitability for use safety-related switching OFF	No

Certificates/ approvals

General Product Approval				EMC	Declaration of Conformity
					
CSA	CCC	UL		RCM	EG-Konf.

Declaration of Conformity	Test Certificates	Marine / Shipping	other
Miscellaneous	Special Test Certificate	Type Test Certificates/Test Report	Confirmation
		 ABS  RMRS	

other	Railway
Miscellaneous	Special Test Certificate

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1075-6LA06>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1075-6LA06>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1075-6LA06>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1075-6LA06&lang=en


Characteristic: Tripping characteristics, I_t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1075-6LA06/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1075-6LA06&objecttype=14&gridview=view1>

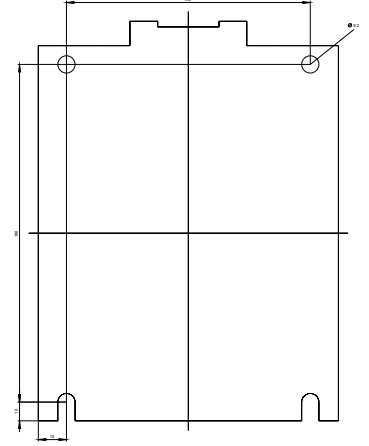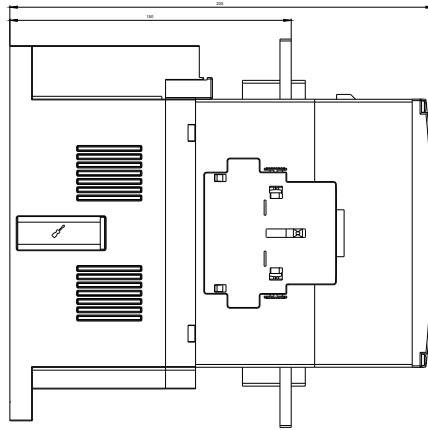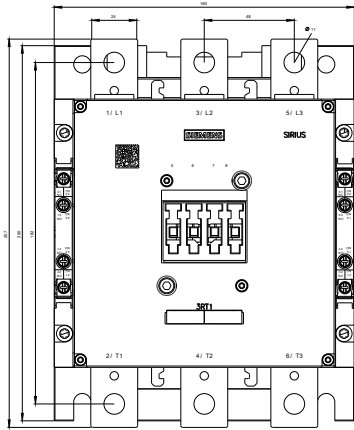

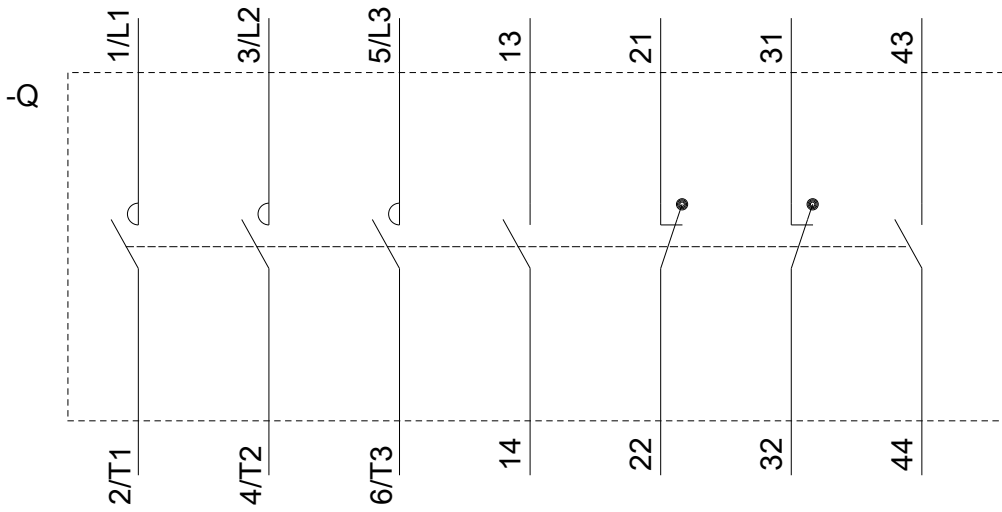

last modified:

11/19/2020

3RT106.-.L..6_0
3RT107.-.L..6_0