

Overload relay 11...16 A Thermal For motor protection Size S00,  
Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit:  
Screw Manual-Automatic-Reset



|                                                                                |                        |
|--------------------------------------------------------------------------------|------------------------|
| product brand name                                                             | SIRIUS                 |
| product designation                                                            | thermal overload relay |
| product type designation                                                       | 3RU2                   |
| General technical data                                                         |                        |
| size of overload relay                                                         | S00                    |
| size of contactor can be combined company-specific                             | S00                    |
| power loss [W] for rated value of the current                                  |                        |
| • at AC in hot operating state                                                 | 8.1 W                  |
| • at AC in hot operating state per pole                                        | 2.7 W                  |
| insulation voltage with degree of pollution 3 at AC rated value                | 690 V                  |
| surge voltage resistance rated value                                           | 6 kV                   |
| maximum permissible voltage for safe isolation                                 |                        |
| • in networks with grounded star point between auxiliary and auxiliary circuit | 440 V                  |
| • in networks with grounded star point between auxiliary and auxiliary circuit | 440 V                  |
| • in networks with grounded star point between main and auxiliary circuit      | 440 V                  |

|                                                                                                                             |                   |
|-----------------------------------------------------------------------------------------------------------------------------|-------------------|
| <ul style="list-style-type: none"> <li>• in networks with grounded star point between main and auxiliary circuit</li> </ul> | 440 V             |
| <b>protection class IP</b>                                                                                                  |                   |
| <ul style="list-style-type: none"> <li>• on the front</li> </ul>                                                            | IP20              |
| <ul style="list-style-type: none"> <li>• of the terminal</li> </ul>                                                         | IP20              |
| <b>shock resistance</b>                                                                                                     |                   |
| <ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-27</li> </ul>                                                  | 8g / 11 ms        |
| <b>type of protection according to ATEX directive 2014/34/EU</b>                                                            | Ex II (2) GD      |
| certificate of suitability according to ATEX directive 2014/34/EU                                                           | DMT 98 ATEX G 001 |
| <b>reference code acc. to IEC 81346-2</b>                                                                                   | F                 |

#### Ambient conditions

|                                                                                                             |                |
|-------------------------------------------------------------------------------------------------------------|----------------|
| <ul style="list-style-type: none"> <li>• installation altitude at height above sea level maximum</li> </ul> | 2 000 m        |
| <b>ambient temperature</b>                                                                                  |                |
| <ul style="list-style-type: none"> <li>• during operation</li> </ul>                                        | -40 ... +70 °C |
| <ul style="list-style-type: none"> <li>• during storage</li> </ul>                                          | -55 ... +80 °C |
| <ul style="list-style-type: none"> <li>• during transport</li> </ul>                                        | -55 ... +80 °C |
| <b>temperature compensation</b>                                                                             | -40 ... +60 °C |
| relative humidity during operation                                                                          | 10 ... 95 %    |

#### Main circuit

|                                                                                            |              |
|--------------------------------------------------------------------------------------------|--------------|
| <b>number of poles for main current circuit</b>                                            | 3            |
| <b>adjustable current response value current of the current-dependent overload release</b> | 11 ... 16 A  |
| <b>operating voltage</b>                                                                   |              |
| <ul style="list-style-type: none"> <li>• rated value</li> </ul>                            | 690 V        |
| <ul style="list-style-type: none"> <li>• at AC-3 rated value maximum</li> </ul>            | 690 V        |
| <b>operating frequency rated value</b>                                                     | 50 ... 60 Hz |
| <b>operational current rated value</b>                                                     | 16 A         |
| operating power at AC-3                                                                    |              |
| <ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>                   | 7.5 kW       |
| <ul style="list-style-type: none"> <li>• at 500 V rated value</li> </ul>                   | 7.5 kW       |
| <ul style="list-style-type: none"> <li>• at 690 V rated value</li> </ul>                   | 11 kW        |

#### Auxiliary circuit

|                                                                            |                             |
|----------------------------------------------------------------------------|-----------------------------|
| <b>design of the auxiliary switch</b>                                      | integrated                  |
| <b>number of NC contacts for auxiliary contacts</b>                        | 1                           |
| <ul style="list-style-type: none"> <li>• note</li> </ul>                   | for contactor disconnection |
| <b>number of NO contacts for auxiliary contacts</b>                        | 1                           |
| <ul style="list-style-type: none"> <li>• note</li> </ul>                   | for message "Tripped"       |
| <b>number of CO contacts</b>                                               |                             |
| <ul style="list-style-type: none"> <li>• for auxiliary contacts</li> </ul> | 0                           |

|                                                             |             |
|-------------------------------------------------------------|-------------|
| <b>operational current of auxiliary contacts at AC-15</b>   |             |
| • at 24 V                                                   | 3 A         |
| • at 110 V                                                  | 3 A         |
| • at 120 V                                                  | 3 A         |
| • at 125 V                                                  | 3 A         |
| • at 230 V                                                  | 2 A         |
| • at 400 V                                                  | 1 A         |
| <b>operational current of auxiliary contacts at DC-13</b>   |             |
| • at 24 V                                                   | 2 A         |
| • at 60 V                                                   | 0.3 A       |
| • at 110 V                                                  | 0.22 A      |
| • at 125 V                                                  | 0.22 A      |
| • at 220 V                                                  | 0.11 A      |
| <b>contact rating of auxiliary contacts according to UL</b> | B600 / R300 |

#### Protective and monitoring functions

|                                       |          |
|---------------------------------------|----------|
| <b>trip class</b>                     | CLASS 10 |
| <b>design of the overload release</b> | thermal  |

#### UL/CSA ratings

|                                                     |      |
|-----------------------------------------------------|------|
| <b>full-load current (FLA) for 3-phase AC motor</b> |      |
| • at 480 V rated value                              | 16 A |
| • at 600 V rated value                              | 16 A |

#### Short-circuit protection

|                                                                 |                           |
|-----------------------------------------------------------------|---------------------------|
| <b>design of the fuse link</b>                                  |                           |
| • for short-circuit protection of the auxiliary switch required | fuse gG: 6 A, quick: 10 A |

#### Installation/ mounting/ dimensions

|                          |                   |
|--------------------------|-------------------|
| <b>mounting position</b> | any               |
| <b>fastening method</b>  | Contactormounting |
| <b>height</b>            | 76 mm             |
| <b>width</b>             | 45 mm             |
| <b>depth</b>             | 70 mm             |

#### Connections/ Terminals

|                                                                      |                      |
|----------------------------------------------------------------------|----------------------|
| <b>product function</b>                                              |                      |
| • removable terminal for auxiliary and control circuit               | No                   |
| <b>type of electrical connection</b>                                 |                      |
| • for main current circuit                                           | screw-type terminals |
| • for auxiliary and control circuit                                  | screw-type terminals |
| <b>arrangement of electrical connectors for main current circuit</b> | Top and bottom       |
| <b>type of connectable conductor cross-sections</b>                  |                      |

|                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG cables for main contacts</li> </ul>                                                                                                     | 2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> ), 2x 4 mm <sup>2</sup><br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14), 2x 12 |
| <ul style="list-style-type: none"> <li>• type of connectable conductor cross-sections for auxiliary contacts <ul style="list-style-type: none"> <li>— solid or stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• type of connectable conductor cross-sections at AWG cables for auxiliary contacts</li> </ul> | 2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> )<br>2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )<br>2x (20 ... 16), 2x (18 ... 14)                              |
| <b>tightening torque</b>                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> <li>• for auxiliary contacts with screw-type terminals</li> </ul>                                                                                                                                                                                     | 0.8 ... 1.2 N·m<br>0.8 ... 1.2 N·m                                                                                                                                                                            |
| <b>design of screwdriver shaft</b>                                                                                                                                                                                                                                                                                                              | Diameter 5 ... 6 mm                                                                                                                                                                                           |
| <b>size of the screwdriver tip</b>                                                                                                                                                                                                                                                                                                              | Pozidriv PZ 2                                                                                                                                                                                                 |
| <b>design of the thread of the connection screw</b>                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• for main contacts</li> <li>• of the auxiliary and control contacts</li> </ul>                                                                                                                                                                                                                          | M3<br>M3                                                                                                                                                                                                      |
| <b>Safety related data</b>                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                               |
| <b>failure rate [FIT]</b>                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> </ul>                                                                                                                                                                                                                                                       | 50 FIT                                                                                                                                                                                                        |
| <b>MTTF with high demand rate</b>                                                                                                                                                                                                                                                                                                               | 2 280 y                                                                                                                                                                                                       |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b>                                                                                                                                                                                                                                                                       | 20 y                                                                                                                                                                                                          |
| <b>Display</b>                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                               |
| <b>display version</b>                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• for switching status</li> </ul>                                                                                                                                                                                                                                                                        | Slide switch                                                                                                                                                                                                  |
| <b>Certificates/ approvals</b>                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                               |

| General Product Approval | For use in hazardous locations |
|--------------------------|--------------------------------|
|--------------------------|--------------------------------|



| Declaration of Conformity | Test Certificates | Marine / Shipping |
|---------------------------|-------------------|-------------------|
|---------------------------|-------------------|-------------------|



[Miscellaneous](#)

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



| Marine / Shipping | other |
|-------------------|-------|
|-------------------|-------|



[Confirmation](#)

| Railway |
|---------|
|---------|

[Vibration and Shock](#)

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-4AB0>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-4AB0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-4AB0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RU2116-4AB0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RU2116-4AB0&lang=en)


**Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current**


<https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-4AB0/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-4AB0&objecttype=14&gridview=view1>

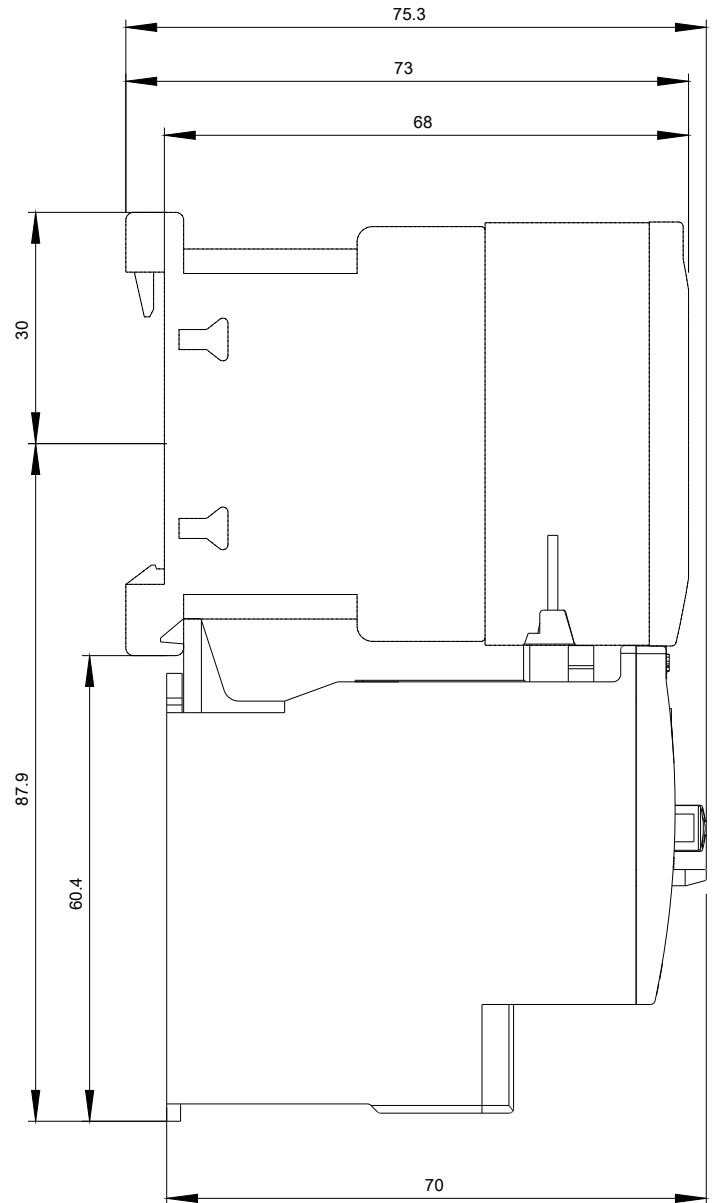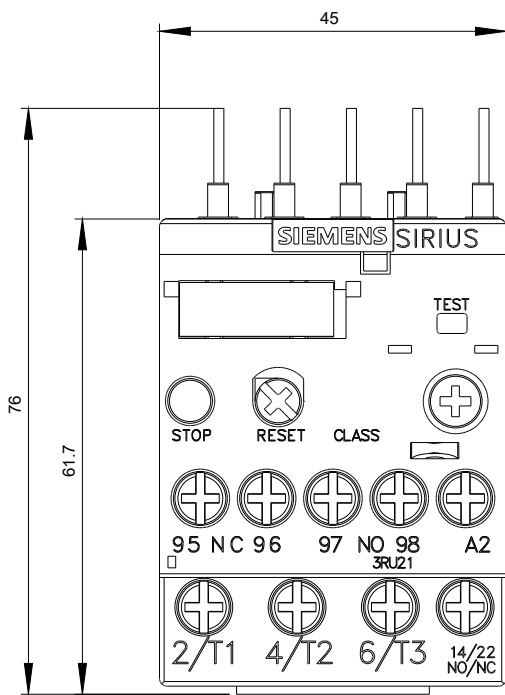

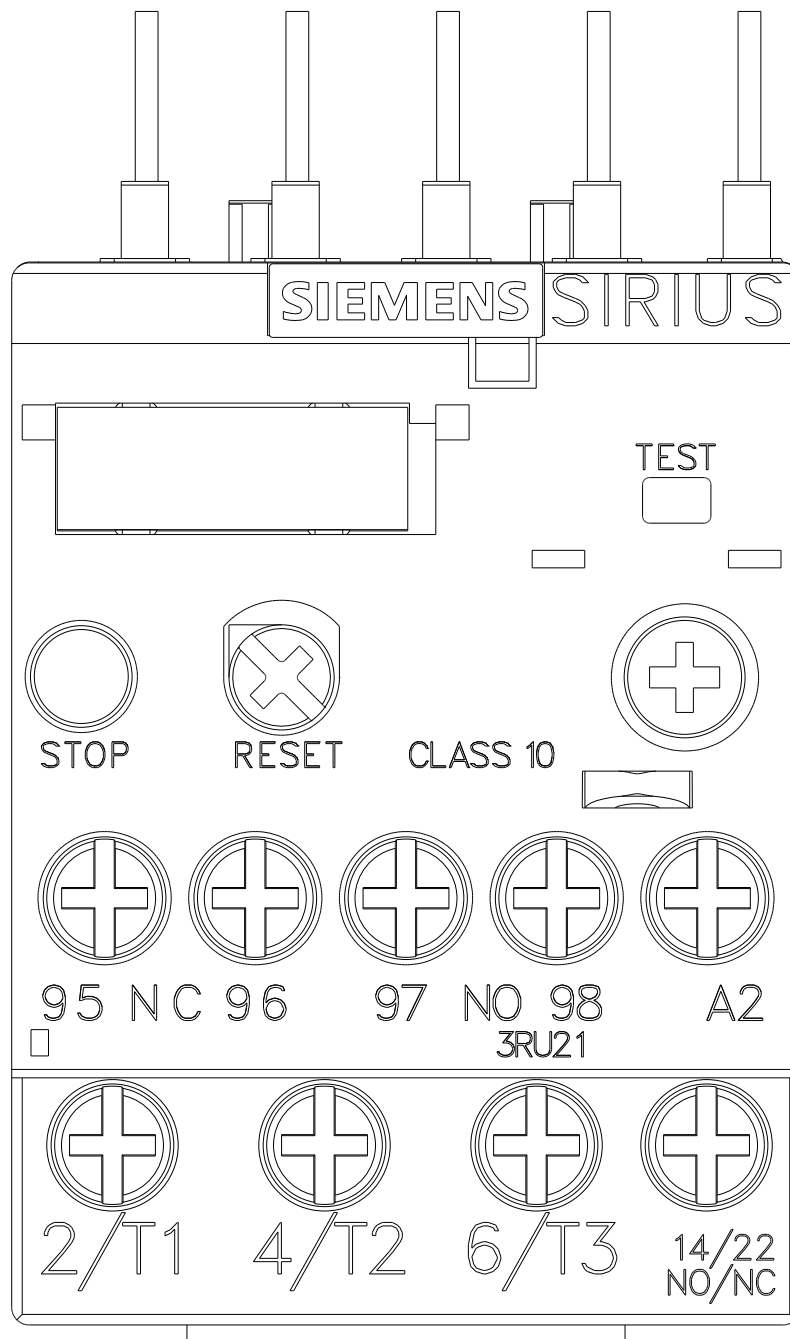

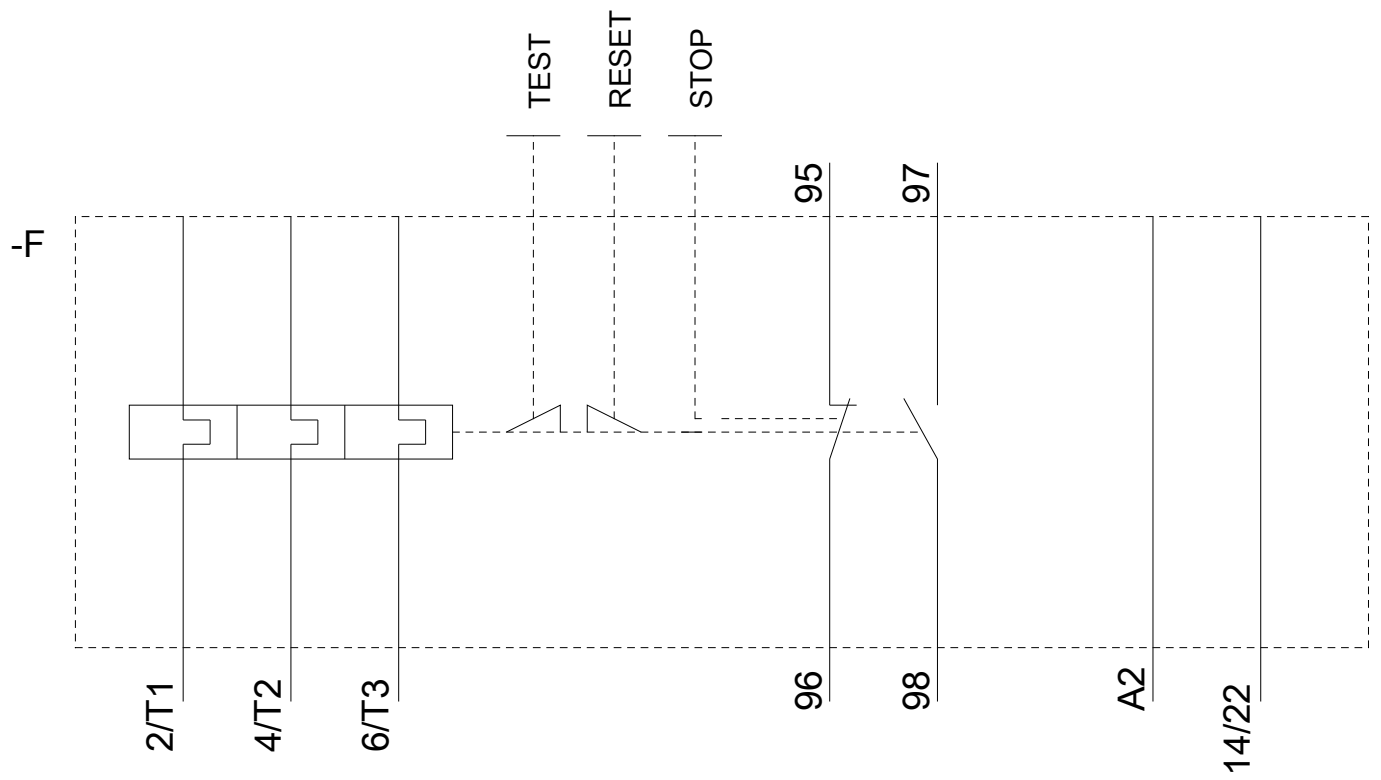

last modified:

11/20/2020