

3-phase supply terminal Size S2 for 3-phase busbar connection from top

General technical data		
Product brand name		SIRIUS
Product designation		Three-phase feeder terminal
Design of the product		Size S2
Size of the circuit-breaker		S2
Protection class IP on the front		IP20
Insulation voltage with degree of pollution 3 at AC rated value	V	690
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
Ampacity maximum	A	108
Installation/ mounting/ dimensions		
Width	mm	54
Height	mm	59
Depth	mm	44
Connections/ Terminals		
Type of electrical connection for main current circuit		screw-type terminals
Type of connectable conductor cross-sections		
• for main contacts		
— solid		1x (10 ... 50 mm ²)
— stranded		1x (10 ... 50 mm ²)
• at AWG conductors for main contacts		1x (8 ... 0)
Certificates/ approvals		
Certificate of suitability		CE / UL / CSA / CCC

General Product Approval	Declaration of Conformity	Shipping Approval
--------------------------	---------------------------	-------------------



[Miscellaneous](#)



Shipping Approval	other
-------------------	-------



[Confirmation](#)



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1935-5A>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1935-5A>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1935-5A>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1935-5A&lang=en

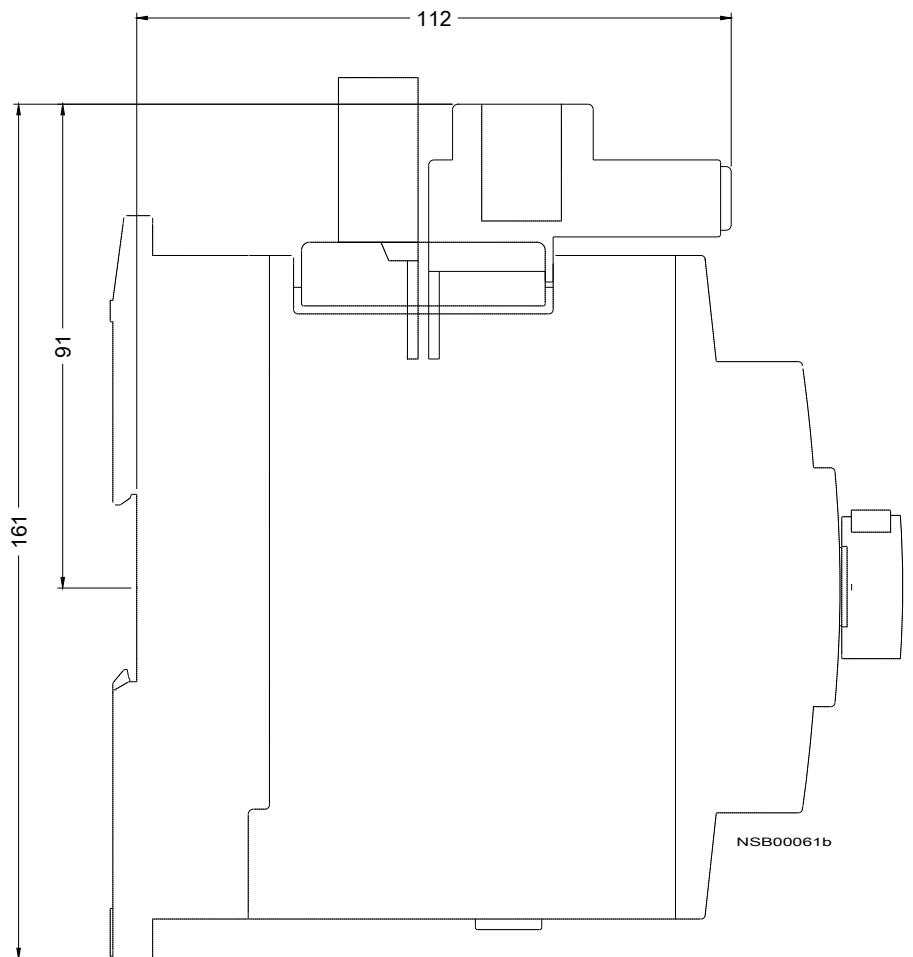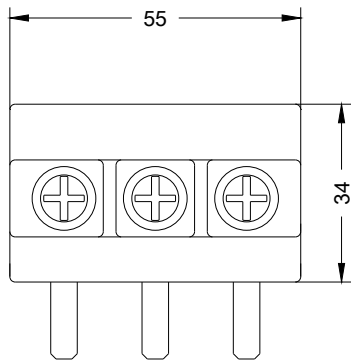

last modified:

05/15/2020