

Current measuring module, Set current 63...630 A Overall width 145 mm, busbar connection



product brand name	SIRIUS
product designation	Current measuring module
General technical data	
product function	
• current measurement	Yes
• voltage measurement	No
• active power measurement	No
• power measurement	No
• frequency measurement	No
product component	
• input for thermistor connection	No
insulation voltage	
• with degree of pollution 3 at AC rated value	690 V
• for wires of main circuit acc. to IEC 60947-1 rated value	8 kV
surge voltage resistance rated value	8 000 V
protection class IP	IP00
shock resistance	
• acc. to IEC 60068-2-27	15g / 11 ms

vibration resistance	1-6 Hz / 15 mm; 6-500 Hz / 2 g
reference code acc. to DIN EN 81346-2	F
certificate of suitability	
• according to ATEX directive 2014/34/EU	BVS 06 ATEX F001
explosion device group and category according to ATEX directive 2014/34/EU	II (2) G, II (2) D, I (M2)

Electromagnetic compatibility

EMC emitted interference	
• acc. to IEC 60947-1	class A
EMI immunity acc. to IEC 60947-1	corresponds to degree of severity 3
conducted interference	
• due to burst acc. to IEC 61000-4-4	2 kV
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m

Inputs/ Outputs

number of outputs as contact-affected switching element	0
--	---

Protective and monitoring functions

product function	
• power factor monitoring	No
• ground-fault monitoring	No
• voltage detection	No
product function	
• current detection	Yes
• overload protection	Yes

Installation/ mounting/ dimensions

mounting position	any
• mounting type	direct mounting / stand-alone installation
height	147 mm
width	145 mm
depth	148 mm
required spacing	
• top	30 mm
• bottom	30 mm
• left	0 mm
• right	0 mm

Connections/ Terminals

type of connectable conductor cross-sections at the measurement inputs for current	
• solid with core end processing • stranded with core end processing • at AWG conductors	50 mm² ... 240 mm² 70 mm² ... 240 mm² 1/0 kcmil ... 500 kcmil
design of the thread of the connection screw at the measurement inputs for current	M8 x 25

Ambient conditions	
• installation altitude at height above sea level 1 maximum • installation altitude at height above sea level 2 maximum • installation altitude at height above sea level 3 maximum	2 000 m 3 000 m; max. +50 °C (no protective separation) 4 000 m; max. +40 °C (no protective separation)
environmental category	
• during operation acc. to IEC 60721 • during storage acc. to IEC 60721 • during transport acc. to IEC 60721	3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4 2K2, 2C1, 2S1, 2M2
relative humidity	
• during operation	5 ... 95 %

Short-circuit protection	
product function short circuit protection	No

Galvanic isolation	
(electrically) protective separation acc. to IEC 60947-1	All circuits with protective separation (double creepage paths and clearances), the information in the "Protective Separation" test report, No. A0258, must be observed (link see further information)

Main circuit	
number of poles for main current circuit	3
adjustable pick-up value current of the current-dependent overload release	63 ... 630 A
operating voltage	
• at AC — at 50 Hz rated value — at 60 Hz rated value	110 ... 690 V 110 ... 690 V
operating frequency rated value	50 ... 60 Hz

Control circuit/ Control	
type of voltage	AC

Certificates/ approvals	
--------------------------------	--

General Product Approval	EMC	For use in hazardous locations
--------------------------	-----	--------------------------------



For use in hazardous locations	Declaration of Conformity	Test Certificates	Marine / Shipping
--------------------------------	---------------------------	-------------------	-------------------

[Explosion Protection Certificate](#)



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Marine / Shipping	other
-------------------	-------



[Confirmation](#)



[PROFINET-Certification](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7104-1BA00-0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7104-1BA00-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3UF7104-1BA00-0>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7104-1BA00-0&lang=en

Test report No. A0258, protective separation

<https://support.industry.siemens.com/cs/ww/en/view/109748152>

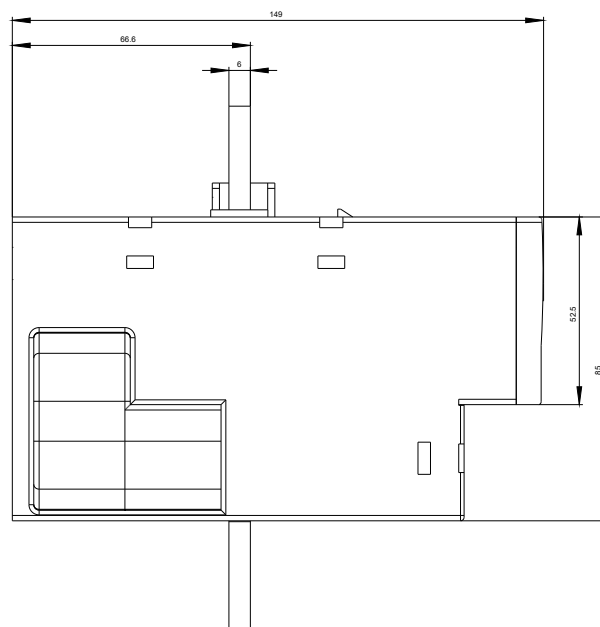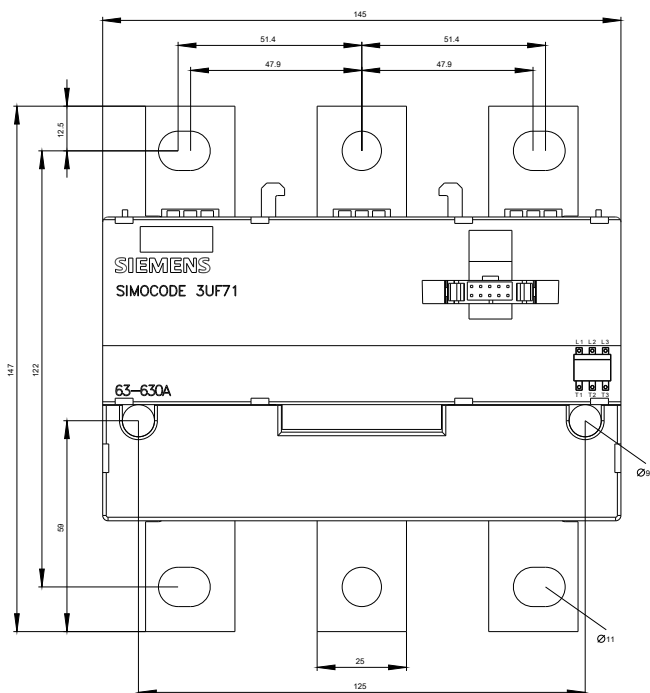

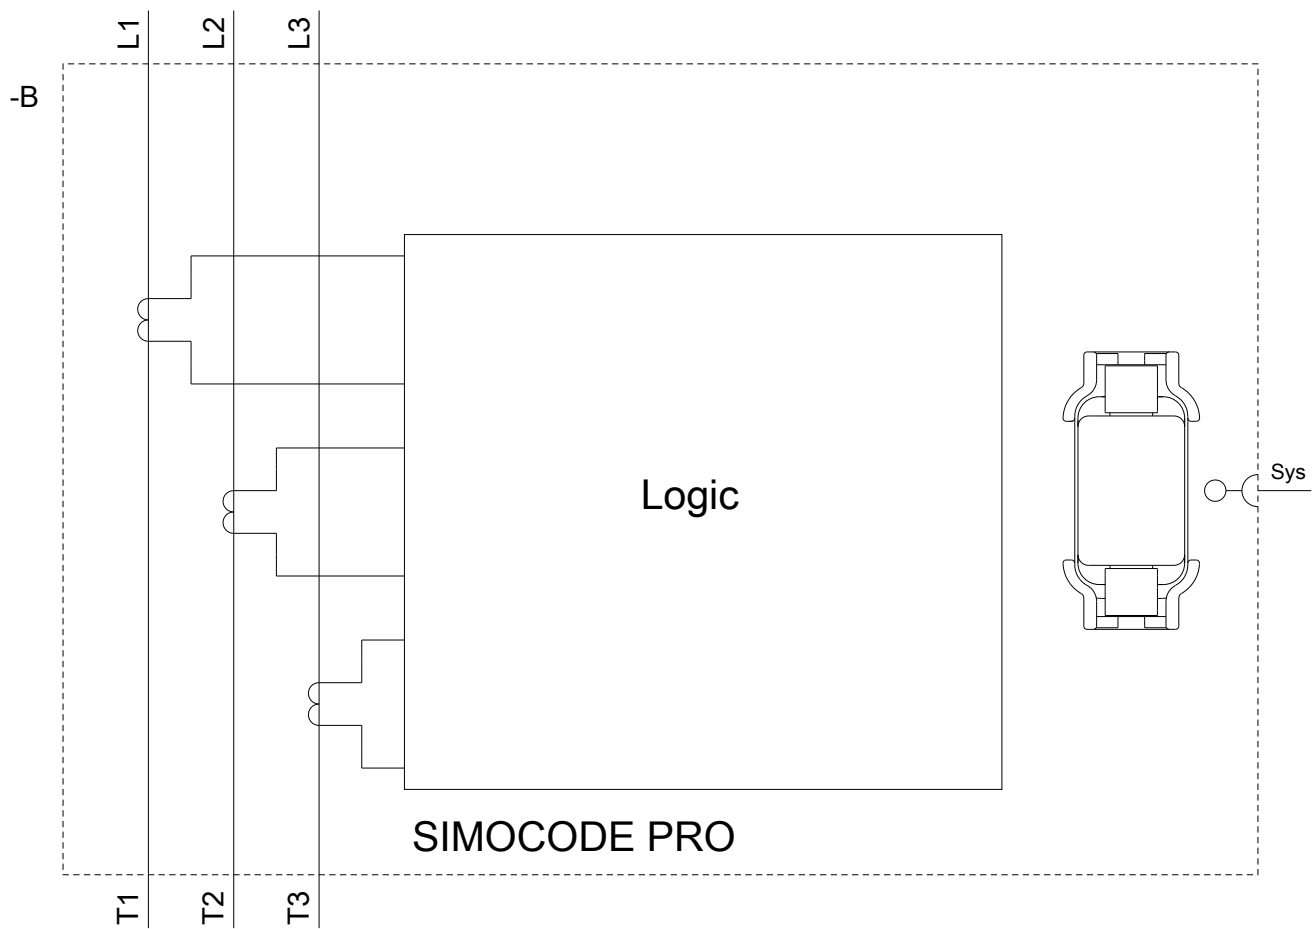

last modified:

09/23/2020