

Operator panel titanium gray, installation in control cabinet door or front plate, can be plugged onto basic unit or extension modules, 10 LEDs for status display and 5 freely assignable keys for manual control



product brand name	SIRIUS
product designation	operator panels
General technical data	
insulation voltage	
• rated value	300 V
surge voltage resistance rated value	4 000 V
protection class IP	
• on the front	IP54
vibration resistance	1-6 Hz / 15 mm; 6-500 Hz / 2 g
reference code acc. to IEC 81346-2	A
Electromagnetic compatibility	
EMC emitted interference	
• acc. to IEC 60947-1	class A
EMC immunity acc. to IEC 60947-1	corresponds to degree of severity 3
conducted interference	
• due to burst acc. to IEC 61000-4-4	1 kV
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV

- due to conductor-conductor surge acc. to IEC 61000-4-5

1 kV

field-based interference acc. to IEC 61000-4-3

10 V/m

Installation/ mounting/ dimensions

mounting position	any
fastening method	front panel mounting
height	36 mm
width	96 mm
depth	44 mm

Ambient conditions

• installation altitude at height above sea level maximum	4 000 m
• installation altitude at height above sea level 1 maximum	2 000 m
• installation altitude at height above sea level 2 maximum	3 000 m; max. +50 °C (no protective separation)
• installation altitude at height above sea level 3 maximum	4 000 m; max. +40 °C (no protective separation)
environmental category • during operation acc. to IEC 60721 • during storage acc. to IEC 60721 • during transport acc. to IEC 60721	3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4 2K2, 2C1, 2S1, 2M2

Certificates/ approvals

General Product Approval			EMC	Declaration of Conformity	Test Certificates
 CSA	 UL	 EAC	 RCM	 EG-Konf.	Type Test Certificates/Test Report

Marine / Shipping			other		
 ABS	 RMRS	 DNV-GL DNVGL.COM/AF	Confirmation	 Profibus	PROFINET-Certification

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7200-1AA01-0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7200-1AA01-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3UF7200-1AA01-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7200-1AA01-0&lang=en



Test report No. A0258, protective separation

<https://support.industry.siemens.com/cs/ww/en/view/109748152>

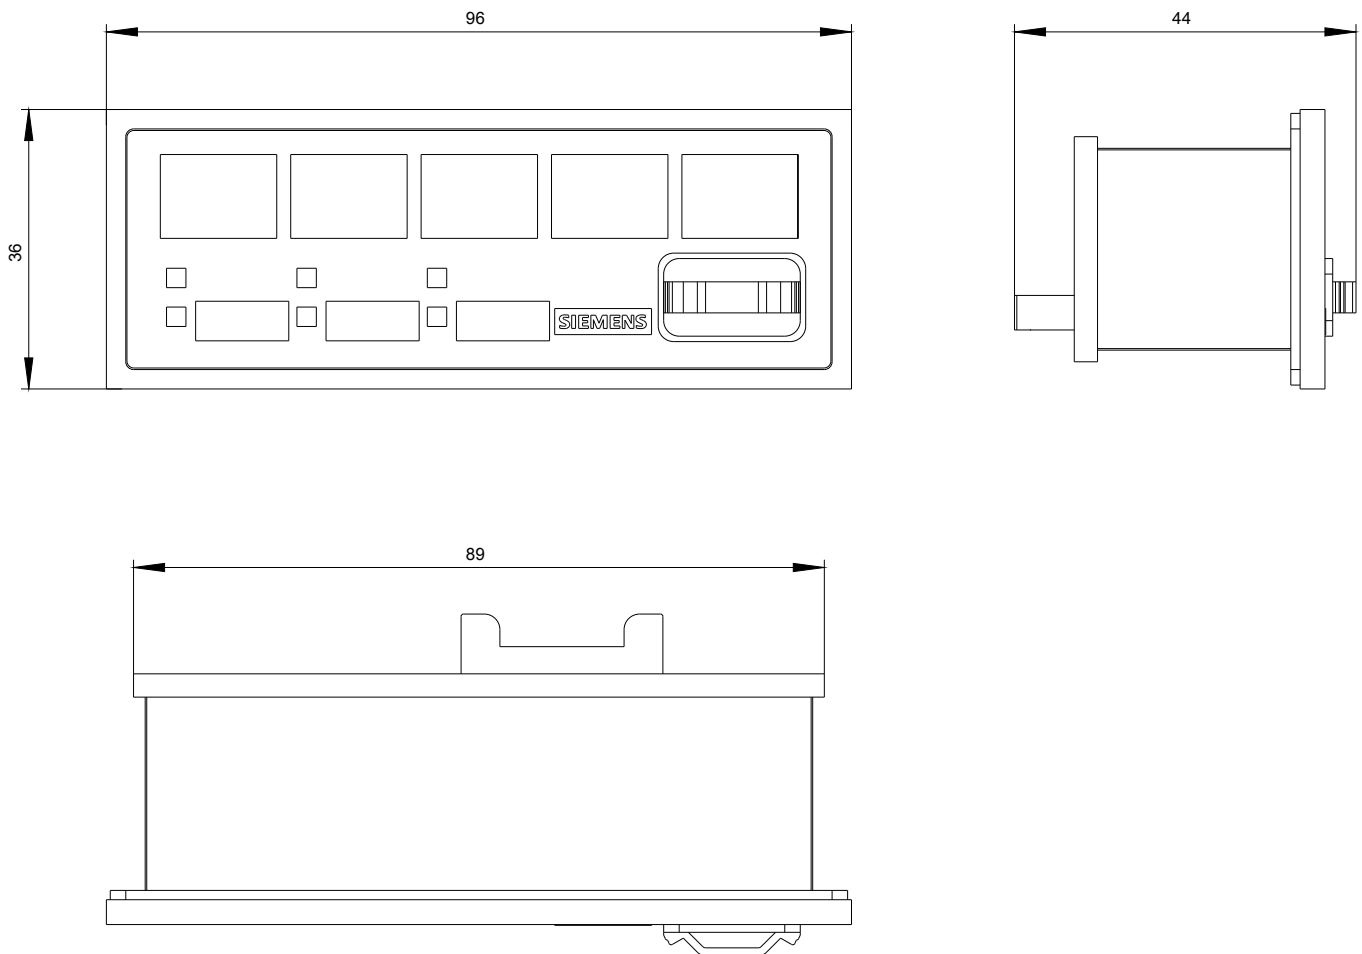

-K

Sys

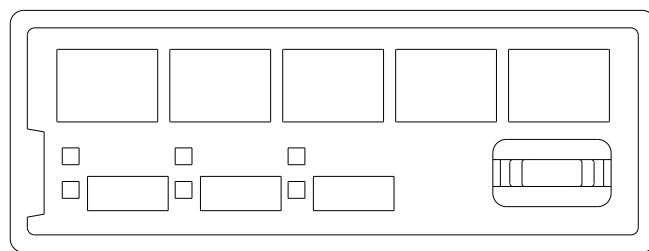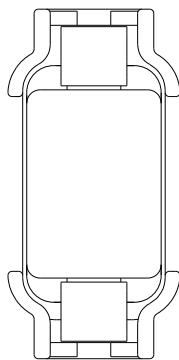

SIMOCODE PRO

last modified:

11/20/2020