

LEDrail 8000

Aesthetically crisp & professionally elegant.

In design sometimes less is more, and that is certainly true for the clean lines of the Ledrail 8000. This luminaire's driver and power management system is all housed within the fitting giving it a sleek profile.

Retail

IP 40

Built in Driver



SPEC SHEET

LEDrail 8000 108

KEY FEATURES

Effective Lumen:	8601 lm	9969 lm	11283 lm
240V:	66W	80W	92W
Efficacy:	131 lm/w	125 lm/w	123 lm/w
Max Ta:	50°C	50°C	50°C
L&B:	L80/90 B10 F10 70K hrs	L80/90 B10 F10 70K hrs	L80 B10 F10 70K hrs

MODULAR

• With extra Lumen Packages up to 11200 lm.

5 SIZE OPTIONS

- LEDrail 8000 104
- LEDrail 8000 105
- LEDrail 8000 106
- LEDrail 8000 107
- LEDrail 8000 108

OPTICS

• Infinity diffuser for a continuous band of light

MOUNTING OPTIONS

- Ceiling Mount
- Floating
- Pendant



Optional: Bluetooth, Wifi, DALI & Bi Level. Casambi App featured above.



Fitting length: **2280mm**



kV Protection: 1kV-2kV, 4kV or 10kV on request



5000K standard
3000K, 4000K, 6500K available
CR>80 R9>13



IP Rating: Indoor



Colour Options: White, Anodised & Black



Recyclable



Housing Diffuser: Polycarbonate




Suspended/Pendant Mount



Optional: Bluetooth, Wifi, DALI & Bi Level

Distribution Option

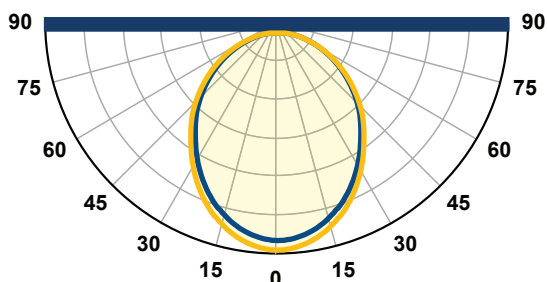

90° Diffused

MARS™
LED LIGHTING SYSTEMS

Magnet
Electrical | Energy

DBN: 031 274 1050 RBY: 035 901 1100
PMB: 033 355 5700 JHB: 011 397 7936
www.magnet.co.za | shop.magnet.co.za | hello@magnet.co.za

