

LEDrail 4100

The undisputed king of retail lighting.

Our flagship linear retail LED solution designed standard with 1kV surge protection upgradeable to 4kV on request. Featuring eight lens options including retail symmetrical designed specifically for retail isles as well as the ability to upgrade to multi-wire circuit configurations and an almost tool-free installation. The LEDrail 4100 is a pre-wired linkable system with plug & play connections.



Retail
IP 40

SPEC SHEET

LEDrail 4100 102

| | | | |
|---------------------------|--|--|--|
| Effective Lumen: | 8258 lm | 12936 lm | 15196 lm |
| 240V: Efficacy: | 59W 139 lm/w | 92W 141 lm/w | 126W 121 lm/w |
| Max Ta: L&B: | 55°C L80 B10 55°C 60K hrs | 45°C L80 B20 45°C 60K hrs | 40°C L80 B50 40°C 60K hrs |

Fitting Size: **1120mm**

See our full brochure for other sizes and specifications.

KEY FEATURES

MODULAR

- With extra Lumen Packages up to 21 000 lm.

LENSES


- 8 different acrylic lenses for countless optic combinations

5 SIZE OPTIONS

- LEDrail 4100 102 560mm
- LEDrail 4100 104 1400mm
- LEDrail 4100 106 1700mm
- LEDrail 4100 108 2350mm
- LEDrail 4100 110 2800mm

MOUNTING OPTIONS

- P2000 Compatible
- Pendant
- Floating
- Recessed

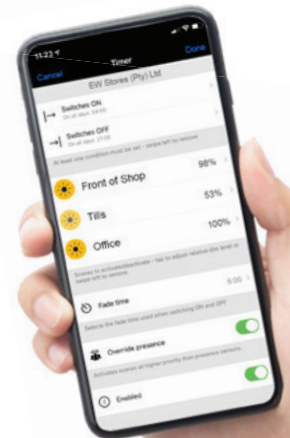

Optional:
Bluetooth, Wifi, Dali & Bi Level. Casambi App featured above.



kV
kV Protection:
1kV-2kV.
4kV or 10kV on request

KELVIN
Colour Temp:
3000, 4000,
5600K
CR>80 R9>13

IP 40
IP Rating:
Indoor

Modular:
Expandable
system





Recyclable

PMMA
Housing
Diffuser:
Polycarbonate

**P2000
Mount**

Optional:
Bluetooth, Wifi,
Dali & Bi Level

8 Distribution Options



MARS™
LED LIGHTING SYSTEMS

Magnet
Electrical | Energy

DBN: 031 274 1050 **RBV:** 035 901 1100
PMB: 033 355 5700 **JHB:** 011 397 7936
www.magnet.co.za | shop.magnet.co.za | hello@magnet.co.za

