

Power contactor, AC-3 115 A, 55 kW / 400 V AC (50-60 Hz) / DC operation 110-127 V UC Auxiliary contacts 2 NO + 2 NC 3-pole, Size S6 Busbar connections Drive: conventional screw terminal



| | |
|--|-----------------|
| product brand name | SIRIUS |
| product designation | Power contactor |
| product type designation | 3RT1 |
| General technical data | |
| size of contactor | S6 |
| product extension | |
| • function module for communication | No |
| • auxiliary switch | Yes |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state | 21 W |
| • at AC in hot operating state per pole | 7 W |
| power loss [W] for rated value of the current without load current share typical | 5.2 W |
| surge voltage resistance | |
| • of main circuit rated value | 8 kV |
| • of auxiliary circuit rated value | 6 kV |
| maximum permissible voltage for safe isolation | |
| • between coil and main contacts acc. to EN 60947-1 | 690 V |

| | |
|---|---|
| protection class IP | |
| <ul style="list-style-type: none"> • on the front • of the terminal | IP00; IP20 on the front with cover / box terminal IP00 |
| shock resistance at rectangular impulse | |
| <ul style="list-style-type: none"> • at AC • at DC | 8,5g / 5 ms, 4,2g / 10 ms 8,5g / 5 ms, 4,2g / 10 ms |
| shock resistance with sine pulse | |
| <ul style="list-style-type: none"> • at AC • at DC | 13,4g / 5 ms, 6,5g / 10 ms 13,4g / 5 ms, 6,5g / 10 ms |
| mechanical service life (switching cycles) | |
| <ul style="list-style-type: none"> • of contactor typical • of the contactor with added electronically optimized auxiliary switch block typical • of the contactor with added auxiliary switch block typical | 10 000 000 5 000 000 10 000 000 |
| reference code acc. to IEC 81346-2 | Q |

| | |
|---|----------------------------------|
| Ambient conditions | |
| <ul style="list-style-type: none"> • installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| <ul style="list-style-type: none"> • during operation • during storage | -25 ... +60 °C -55 ... +80 °C |

| | |
|--|---|
| Main circuit | |
| number of poles for main current circuit | 3 |
| number of NO contacts for main contacts | 3 |
| operating voltage | |
| <ul style="list-style-type: none"> • at AC-3 rated value maximum | 1 000 V |
| operational current | |
| <ul style="list-style-type: none"> • at AC-1 at 400 V <ul style="list-style-type: none"> — at ambient temperature 40 °C rated value • at AC-1 <ul style="list-style-type: none"> — up to 690 V at ambient temperature 40 °C rated value — up to 690 V at ambient temperature 60 °C rated value — up to 1000 V at ambient temperature 40 °C rated value — up to 1000 V at ambient temperature 60 °C rated value • at AC-3 <ul style="list-style-type: none"> — at 400 V rated value — at 500 V rated value | 160 A 160 A 140 A 80 A 80 A 115 A 115 A |

| | |
|--|--------------------|
| — at 690 V rated value | 115 A |
| — at 1000 V rated value | 53 A |
| • at AC-4 at 400 V rated value | 97 A |
| • at AC-5a up to 690 V rated value | 140 A |
| • at AC-5b up to 400 V rated value | 95 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=20 rated value | 115 A |
| — up to 400 V for current peak value n=20 rated value | 115 A |
| — up to 500 V for current peak value n=20 rated value | 115 A |
| — up to 690 V for current peak value n=20 rated value | 115 A |
| — up to 1000 V for current peak value n=20 rated value | 53 A |
| • at AC-6a | |
| — up to 230 V for current peak value n=30 rated value | 98 A |
| — up to 400 V for current peak value n=30 rated value | 98 A |
| — up to 500 V for current peak value n=30 rated value | 98 A |
| — up to 690 V for current peak value n=30 rated value | 98 A |
| — up to 1000 V for current peak value n=30 rated value | 53 A |
| minimum cross-section in main circuit | |
| • at maximum AC-1 rated value | 70 mm ² |
| operational current for approx. 200000 operating cycles at AC-4 | |
| • at 400 V rated value | 54 A |
| • at 690 V rated value | 48 A |
| operational current | |
| • at 1 current path at DC-1 | |
| — at 24 V rated value | 160 A |
| — at 110 V rated value | 18 A |
| — at 220 V rated value | 3.4 A |
| — at 440 V rated value | 0.8 A |
| — at 600 V rated value | 0.5 A |
| • with 2 current paths in series at DC-1 | |
| — at 24 V rated value | 160 A |
| — at 110 V rated value | 160 A |

| | |
|--|-------------|
| — at 220 V rated value | 20 A |
| — at 440 V rated value | 3.2 A |
| — at 600 V rated value | 1.6 A |
| • with 3 current paths in series at DC-1 | |
| — at 24 V rated value | 160 A |
| — at 110 V rated value | 160 A |
| — at 220 V rated value | 160 A |
| — at 440 V rated value | 11.5 A |
| — at 600 V rated value | 4 A |
| operational current | |
| • at 1 current path at DC-3 at DC-5 | |
| — at 24 V rated value | 160 A |
| — at 110 V rated value | 2.5 A |
| — at 220 V rated value | 0.6 A |
| — at 440 V rated value | 0.17 A |
| — at 600 V rated value | 0.12 A |
| • with 2 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 160 A |
| — at 110 V rated value | 160 A |
| — at 220 V rated value | 2.5 A |
| — at 440 V rated value | 0.65 A |
| — at 600 V rated value | 0.37 A |
| • with 3 current paths in series at DC-3 at DC-5 | |
| — at 24 V rated value | 160 A |
| — at 110 V rated value | 160 A |
| — at 220 V rated value | 160 A |
| — at 440 V rated value | 1.4 A |
| — at 600 V rated value | 0.75 A |
| operating power | |
| • at AC-3 | |
| — at 230 V rated value | 37 kW |
| — at 400 V rated value | 55 kW |
| — at 500 V rated value | 75 kW |
| — at 690 V rated value | 110 kW |
| — at 1000 V rated value | 75 kW |
| operating power for approx. 200000 operating cycles at AC-4 | |
| • at 400 V rated value | 29 kW |
| • at 690 V rated value | 48 kW |
| operating apparent power at AC-6a | |
| • up to 230 V for current peak value n=20 rated value | 40 000 kV·A |

| | |
|---|---|
| <ul style="list-style-type: none"> • up to 400 V for current peak value n=20 rated value • up to 500 V for current peak value n=20 rated value • up to 690 V for current peak value n=20 rated value • up to 1000 V for current peak value n=20 rated value | 80 000 V·A 100 000 V·A 130 000 V·A 90 000 V·A |
| operating apparent power at AC-6a <ul style="list-style-type: none"> • up to 230 V for current peak value n=30 rated value • up to 400 V for current peak value n=30 rated value • up to 500 V for current peak value n=30 rated value • up to 690 V for current peak value n=30 rated value • up to 1000 V for current peak value n=30 rated value | 30 000 V·A 60 000 V·A 80 000 V·A 110 000 V·A 90 000 V·A |
| short-time withstand current in cold operating state up to 40 °C <ul style="list-style-type: none"> • limited to 1 s switching at zero current maximum • limited to 5 s switching at zero current maximum • limited to 10 s switching at zero current maximum • limited to 30 s switching at zero current maximum • limited to 60 s switching at zero current maximum | 2 565 A; Use minimum cross-section acc. to AC-1 rated value 1 654 A; Use minimum cross-section acc. to AC-1 rated value 1 170 A; Use minimum cross-section acc. to AC-1 rated value 729 A; Use minimum cross-section acc. to AC-1 rated value 572 A; Use minimum cross-section acc. to AC-1 rated value |
| no-load switching frequency <ul style="list-style-type: none"> • at AC • at DC | 2 000 1/h 2 000 1/h |
| operating frequency <ul style="list-style-type: none"> • at AC-1 maximum • at AC-2 maximum • at AC-3 maximum • at AC-4 maximum | 800 1/h 400 1/h 1 000 1/h 130 1/h |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC <ul style="list-style-type: none"> • at 50 Hz rated value • at 60 Hz rated value | 110 ... 127 V 110 ... 127 V |

| | |
|---|------------------|
| control supply voltage at DC | |
| • rated value | 110 ... 127 V |
| operating range factor control supply voltage rated value of magnet coil at DC | |
| • initial value | 0.8 |
| • full-scale value | 1.1 |
| operating range factor control supply voltage rated value of magnet coil at AC | |
| • at 50 Hz | 0.8 ... 1.1 |
| • at 60 Hz | 0.8 ... 1.1 |
| design of the surge suppressor | with varistor |
| apparent pick-up power of magnet coil at AC | |
| • at 50 Hz | 300 V·A |
| inductive power factor with closing power of the coil | |
| • at 50 Hz | 0.9 |
| apparent holding power of magnet coil at AC | |
| • at 50 Hz | 5.8 V·A |
| inductive power factor with the holding power of the coil | |
| • at 50 Hz | 0.8 |
| closing power of magnet coil at DC | 360 W |
| holding power of magnet coil at DC | 5.2 W |
| closing delay | |
| • at AC | 20 ... 95 ms |
| • at DC | 20 ... 95 ms |
| opening delay | |
| • at AC | 40 ... 60 ms |
| • at DC | 40 ... 60 ms |
| arcing time | 10 ... 15 ms |
| control version of the switch operating mechanism | Standard A1 - A2 |

Auxiliary circuit

| | |
|---|------|
| number of NC contacts for auxiliary contacts | |
| • instantaneous contact | 2 |
| number of NO contacts for auxiliary contacts | |
| • instantaneous contact | 2 |
| operational current at AC-12 maximum | 10 A |
| operational current at AC-15 | |
| • at 230 V rated value | 6 A |
| • at 400 V rated value | 3 A |
| • at 500 V rated value | 2 A |
| • at 690 V rated value | 1 A |
| operational current at DC-12 | |

| | |
|---|--|
| <ul style="list-style-type: none"> • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value | 10 A 6 A 6 A 3 A 2 A 1 A 0.15 A |
| operational current at DC-13 | |
| <ul style="list-style-type: none"> • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value | 10 A 2 A 2 A 1 A 0.9 A 0.3 A 0.1 A |
| contact reliability of auxiliary contacts | 1 faulty switching per 100 million (17 V, 1 mA) |

UL/CSA ratings

| | |
|---|---|
| full-load current (FLA) for 3-phase AC motor | |
| <ul style="list-style-type: none"> • at 480 V rated value • at 600 V rated value | 124 A 125 A |
| yielded mechanical performance [hp] | |
| <ul style="list-style-type: none"> • for single-phase AC motor <ul style="list-style-type: none"> — at 230 V rated value • for 3-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value | 25 hp 40 hp 50 hp 100 hp 125 hp |
| contact rating of auxiliary contacts according to UL | A600 / Q600 |

Short-circuit protection

| | |
|---|--|
| design of the fuse link | |
| <ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required | gG: 355 A (690 V, 100 kA) gG: 250 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 250 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) |

Installation/ mounting/ dimensions

| | |
|--------------------------|--|
| mounting position | with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back |
| fastening method | screw fixing |






| | |
|------------------------------|--------|
| • side-by-side mounting | Yes |
| height | 172 mm |
| width | 120 mm |
| depth | 170 mm |
| required spacing | |
| • with side-by-side mounting | |
| — forwards | 20 mm |
| — upwards | 10 mm |
| — downwards | 10 mm |
| — at the side | 0 mm |
| • for grounded parts | |
| — forwards | 20 mm |
| — upwards | 10 mm |
| — at the side | 10 mm |
| — downwards | 10 mm |
| • for live parts | |
| — forwards | 20 mm |
| — upwards | 10 mm |
| — downwards | 10 mm |
| — at the side | 10 mm |



| Connections/ Terminals | |
|---|--|
| width of connection bar | 17 mm |
| thickness of connection bar | 3 mm |
| diameter of holes | 9 mm |
| number of holes | 1 |
| type of electrical connection | |
| • for main current circuit | Connection bar |
| • for auxiliary and control circuit | screw-type terminals |
| • at contactor for auxiliary contacts | Screw-type terminals |
| • of magnet coil | Screw-type terminals |
| type of connectable conductor cross-sections | |
| • at AWG cables for main contacts | 4 ... 250 kcmil |
| connectable conductor cross-section for main contacts | |
| • stranded | 25 ... 120 mm ² |
| connectable conductor cross-section for auxiliary contacts | |
| • solid or stranded | 0.5 ... 4 mm ² |
| • finely stranded with core end processing | 0.5 ... 2.5 mm ² |
| • type of connectable conductor cross-sections for auxiliary contacts | |
| — solid | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), max. 2x (0.75 ... 4 mm ²) |



| | |
|---|---|
| — solid or stranded | 2x (0,5 ... 1,5 mm²), 2x (0,75 ... 2,5 mm²), max. 2x (0,75 ... 4 mm²) |
| — finely stranded with core end processing | 2x (0,5 ... 1,5 mm²), 2x (0,75 ... 2,5 mm²) |
| • type of connectable conductor cross-sections at AWG cables for auxiliary contacts | 2x (20 ... 16), 2x (18 ... 14), 1x 12 |
| AWG number as coded connectable conductor cross section | |
| • for auxiliary contacts | 18 ... 14 |

| Safety related data | |
|---|--|
| B10 value | |
| • with high demand rate acc. to SN 31920 | 1 000 000 |
| product function | |
| • mirror contact acc. to IEC 60947-4-1 | Yes |
| • positively driven operation acc. to IEC 60947-5-1 | No |
| touch protection against electrical shock | finger-safe when touched vertically from front acc. to IEC 60529 |
| suitability for use safety-related switching OFF | Yes |

Certificates/ approvals

| General Product Approval | | | | | EMC |
|--|--|--|--------------------|--|--|
|  |  |  | KC |  |  |
| CSA | CCC | UL | | | RCM |

| Declaration of Conformity | Test Certificates | | | | Marine / Shipping |
|---|-------------------------------|--|--|-------------------------------|---|
|  | Miscellaneous | Type Test Certificates/Test Report | Special Test Certificate | Miscellaneous |  |
| EG-Konf. | | | | | ABS |

| Marine / Shipping | other | Railway | | |
|---|---|------------------------------|-------------------------------|--|
|  |  | Confirmation | Miscellaneous | Special Test Certificate |
| RMRS | DNV-GL DNVGL.COM/AF | | | |

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1054-6AF36>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1054-6AF36>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1054-6AF36>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1054-6AF36&lang=en


Characteristic: Tripping characteristics, I^2t , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1054-6AF36/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1054-6AF36&objecttype=14&gridview=view1>

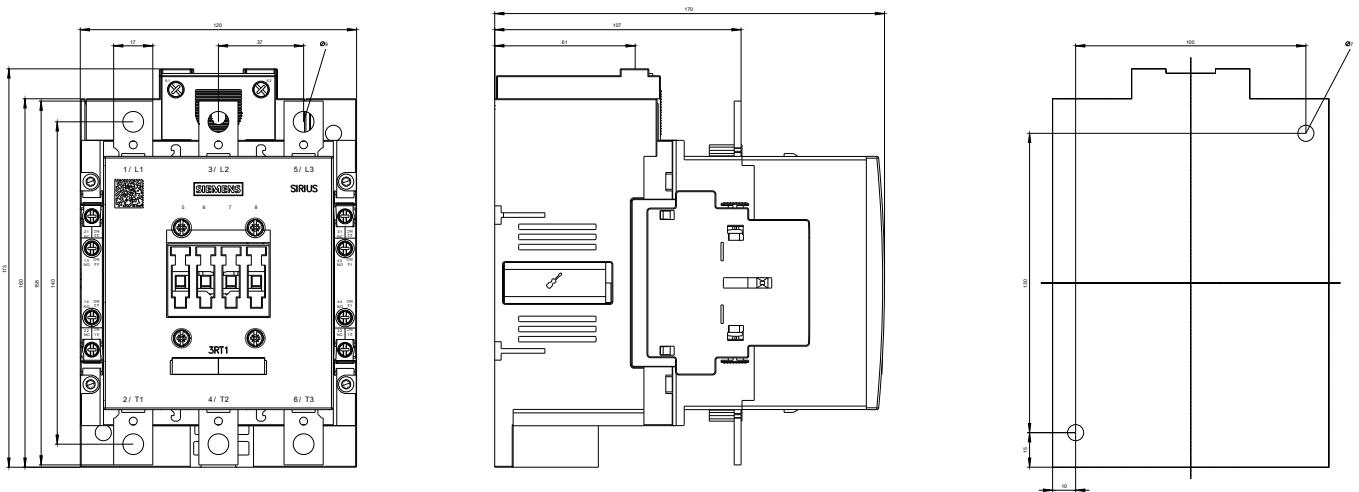

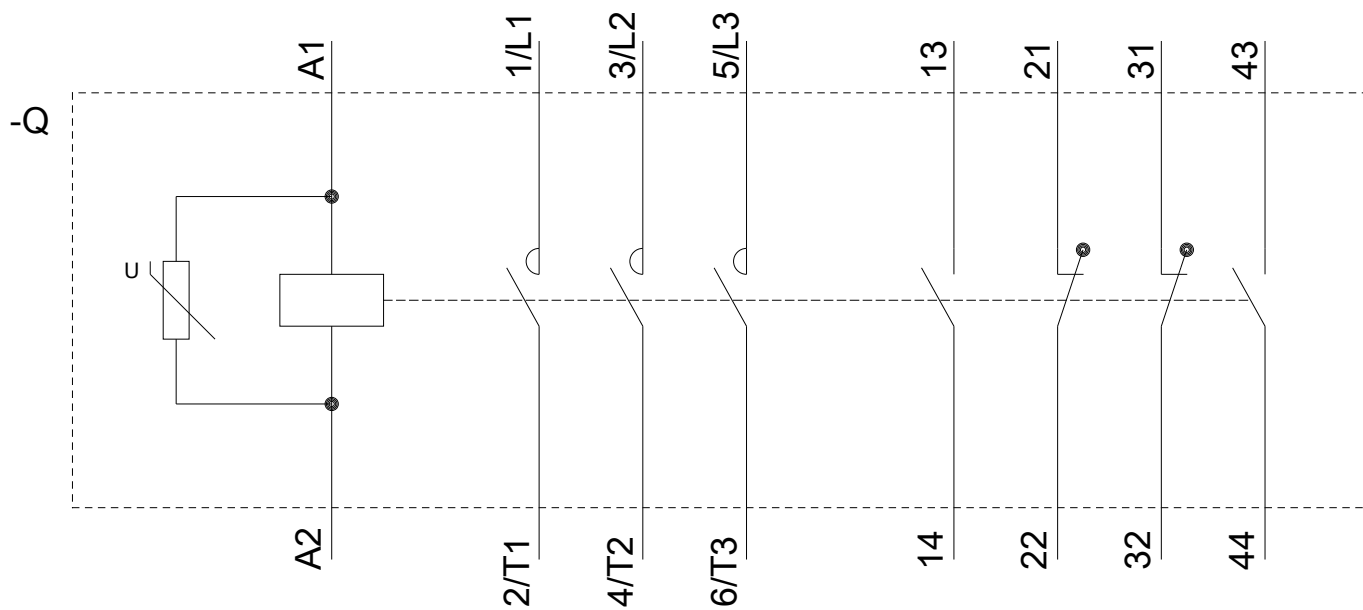

last modified:

11/19/2020