


3-phase supply terminal for 3-phase busbar connection from top Size S00/S0

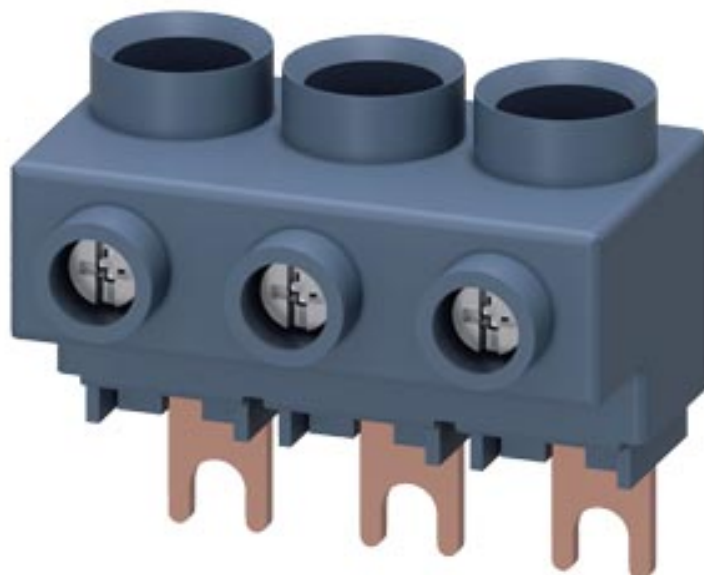

General technical data		
Product brand name		SIRIUS
Product designation		Three-phase feeder terminal
Design of the product		from above, size S0/S00
Size of the circuit-breaker		S00, S0
Protection class IP on the front		IP20
Insulation voltage with degree of pollution 3 at AC rated value	V	690
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
Ampacity maximum	A	63
Installation/ mounting/ dimensions		
Width	mm	44.5
Height	mm	39
Depth	mm	27.2
Connections/ Terminals		
Type of electrical connection for main current circuit		screw-type terminals

Type of connectable conductor cross-sections	
• for main contacts — solid — stranded — finely stranded — with core end processing • at AWG conductors for main contacts	1x (2.5 ... 16 mm ²) 1x (2.5 ... 25 mm ²) 1x (2.5 ... 16 mm ²) 1x (10 ... 4)

Certificates/ approvals

Certificate of suitability	CE / UL / CSA / CCC
-----------------------------------	---------------------

General Product Approval		Declaration of Conformity	Test Certificates
			
CSA	UL	EG-Konf.	Miscellaneous Type Test Certificates/Test Report

Test Certificates	Shipping Approval				
Special Test Certificate					
	ABS	BUREAU VERITAS	LRS	PRS	RINA

Shipping Approval	other	Railway
	Confirmation	Vibration and Shock
RMRS		
	VDE	

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2925-5AB>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2925-5AB>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2925-5AB>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2925-5AB&lang=en

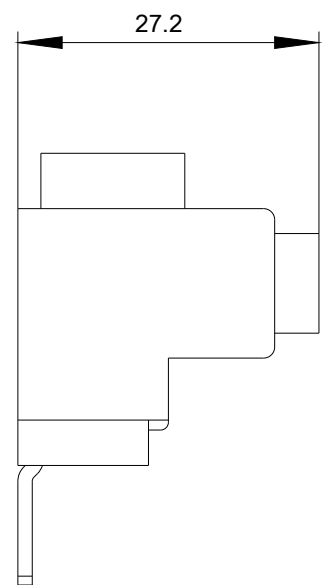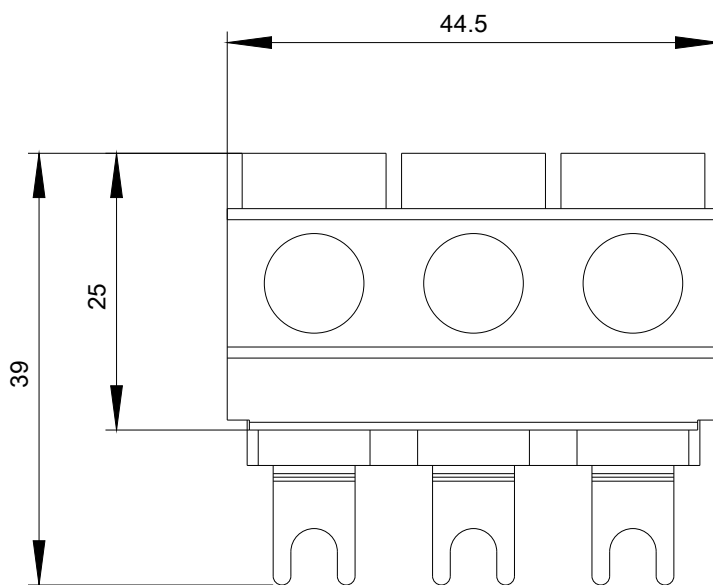

last modified:

09/23/2020