



Shunt trip left 110-127 V AC 50/60 Hz / DC accessory for 3VA1 and 3VA20 up to 3VA25

Model	
product brand name	SETRON
product designation	Accessories
Product version	Auxiliary release
Accessories	Auxiliary release
General technical data	
Degree of pollution	3
Overvoltage category	III
apparent power consumption / maximum	40 VA
consumed active power / at DC / maximum	40 W
Voltage	
surge voltage resistance	4 kV
Mechanical Design	
Height	65.1 mm
Width	25.7 mm
number of slots	3
depth	31.2 mm
net weight	91 g
tightening torque / with screw-type terminals / minimum	0.4 N·m
tightening torque / with screw-type terminals / maximum	0.5 N·m
Connections according IEC	
stripped length	10 mm
AWG number / as coded connectable conductor cross section / for auxiliary contacts	
• minimum	20
• maximum	16
Connections according UL	
stripped length [in]	0.4 in
tightening torque [lbf·in] / with screw-type terminals / minimum	3.5 lbf·in
tightening torque [lbf·in] / with screw-type terminals / maximum	4.4 lbf·in
Further information	

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)


<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9988-0BL32>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9988-0BL32>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9988-0BL32](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9988-0BL32)

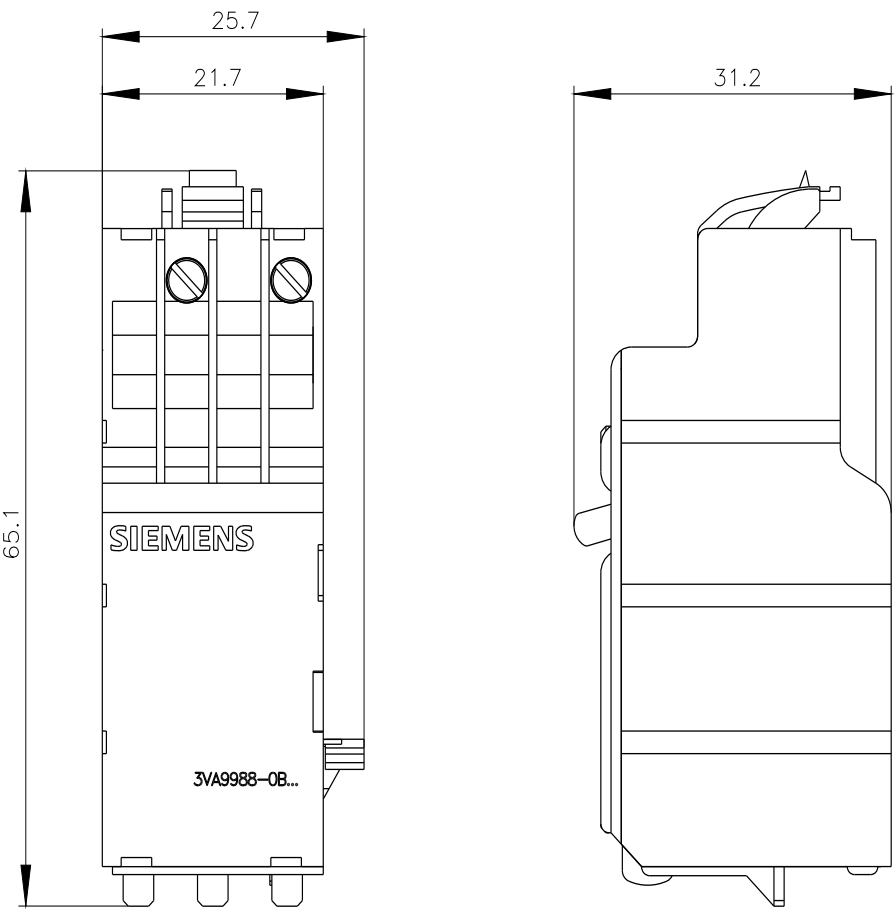

last modified:

12/20/2020 

