


Datasheet of Mantra 40W LED Backlit Panel 600 x 600 4000K

Product Name Mantra 40W LED Backlit Panel 600 x 600 4000K

Product SKU ML-MTR-40W-600x600-5

Product Characteristics

- Backlit technology which ensures no yellowing of dark spots
- 4000K
- Flicker Free and EMC Passed
- Wide input voltage AC170-264V
- 1.5kV Surge Protection for 3 seconds
- Surface mount & suspension kit available
- 24/7 Burning hours will reduce the lifespan of the LED luminaire
- 5 Year Warranty

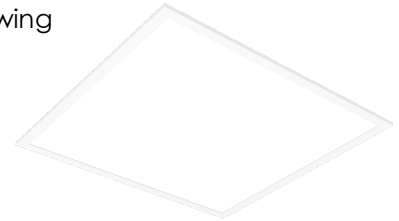

Application Offices, Retail Stores, Hospitals, Restaurants

Product Specification

Power	40W
LEDs	SMD2835
Effective Lumen	4150 lm
Colour	4000K
Colour Rendering Index	RA>84
Unified Glare Rating	< 22
Beam Angle	110°
Driver	Mesmerize Constant Current LED Driver
Power Factor	0,95PF
Input Voltage	AC 170-264V
Input Frequency	50/60HZ
Operating Temperature	-10°C - 40°C
Dimmable	No
Lifespan	L90 @ 53,000 hours - 54.8°C
Warranty	5 Years
Ingress Protection Rating	IP40
Main Materials	Iron Backplate / Aluminium Housing
Certifications	IEC / LOA / EMC / CE / ROHS
Dimension	595mm * 595mm * 30mm

Suspension Accessories



Surface Mount Accessories



Comments..... Project.....